


本圖完工後請速歸還

流水號:926

FABRICATION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
PIPE				
1	PIPE A312-TP304 EFW SCH10S BE ASME B36.19M	4	S1P1/P-4"-10S	19.2M
2	PIPE A312-TP304 EFW SCH10S BE ASME B36.19M	3	S1P1/P-3"-10S	5.8M
3	PIPE A312-TP304 EFW SCH40S PE ASME B36.19M	3/4	S1P1/P-3/4"-40S	0.1M
FITTINGS				
4	REDUCING TEE BW A403-WP304 WELD SCH10S ASME B16.9	4 x 3	S1P1/TB-4"x3"	1
5	REDUCER CONC BW A403-WP304 WELD SCH10S ASME B16.9	4 x 3	S1P1/RC-4"x3"	1
6	SOCKOLET 3000# SW A182-F304 MSS SP-97	4 x 3/4	S1P1/SOL-4"x3/4"	1
7	90 ELBOW LR BW A403-WP304 WELD SCH10S ASME B16.9	4	S1P1/EB-4"x90	1
8	90 ELBOW LR BW A403-WP304 WELD SCH10S ASME B16.9	3	S1P1/EB-3"x90	2
FLANGES				
9	FLANGE WN 150# RF A182-F304 SCH10S BORE ASME B16.5	3	S1P1/FRWN-3"	1
ERECTION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
FITTINGS				
10	NIPPLE (L=100MM) TOE(NPT) A312-TP304 SMLS SCH80S ASME B36.19M	3/4	S1P1/NIP-3/4"x100LXTOE	1
11	CAP 3000# SCRD (FNPT) A182-F304 ASME B16.11	3/4	S1P1/CT-3/4"	1
FLANGES				
12	FLANGE BLIND 150# RF A182-F304 ASME B16.5	3	S1P1/FBR-3"	1
GASKETS				
13	GASKET 150# RF 4.5 MM THICK 304SS SPIRAL WOUND W/GRAPHITE FILLER W/SS304 OUTER RING ASME B16.20/B16.5	3	S1P1/GR-3"	2
BOLTS				
14	STUD BOLT A193 GR.B8 W/ TWO HEX. HEAD HEAVY NUT A194 GR.8 ASME B1.1 B18.2.2	5/8	S1P1/BS4-5/8"x95L	8
VALVES / IN-LINE ITEMS				
15	GATE 150# RF A351-CF8 BB OS & Y RS TRIM 304SS STELLITED FLEXIBLE WEDGE API-600	3	S1P1/VA-3"-1144	1
16	GATE 800# SW A182-F304 BB OS & Y RS TRIM 304SS STELLITED SOLID WEDGE API-602	3/4	S1P1/VA-3/4"-1844	1
SUPPORTS				
17	PIPE SHOE (S1)	4	SUP/S1-4"	4
18	PIPE GUIDE (G5-2)	4	SUP/G5-2-4"	2
19	SUPPORT REINFORCING PAD (SRP-4)	4	SUP/SRP-4"	4
20	PIPE GUIDE (G5-1)	3	SUP/G5-1-3"	1
21	PIPE SHOE (S1)	3	SUP/S1-3"	1
22	SUPPORT REINFORCING PAD (SRP-3)	3	SUP/SRP-3"	1

CUT PIPE LENGTH FOR REFERENCE ONLY							
PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<32>	6000	4		<33>	6000	4	
<34>	100	3/4		<35>	6000	4	
<36>	1193	4		<37>	820	3	
<38>	4407	3		<39>	550	3	

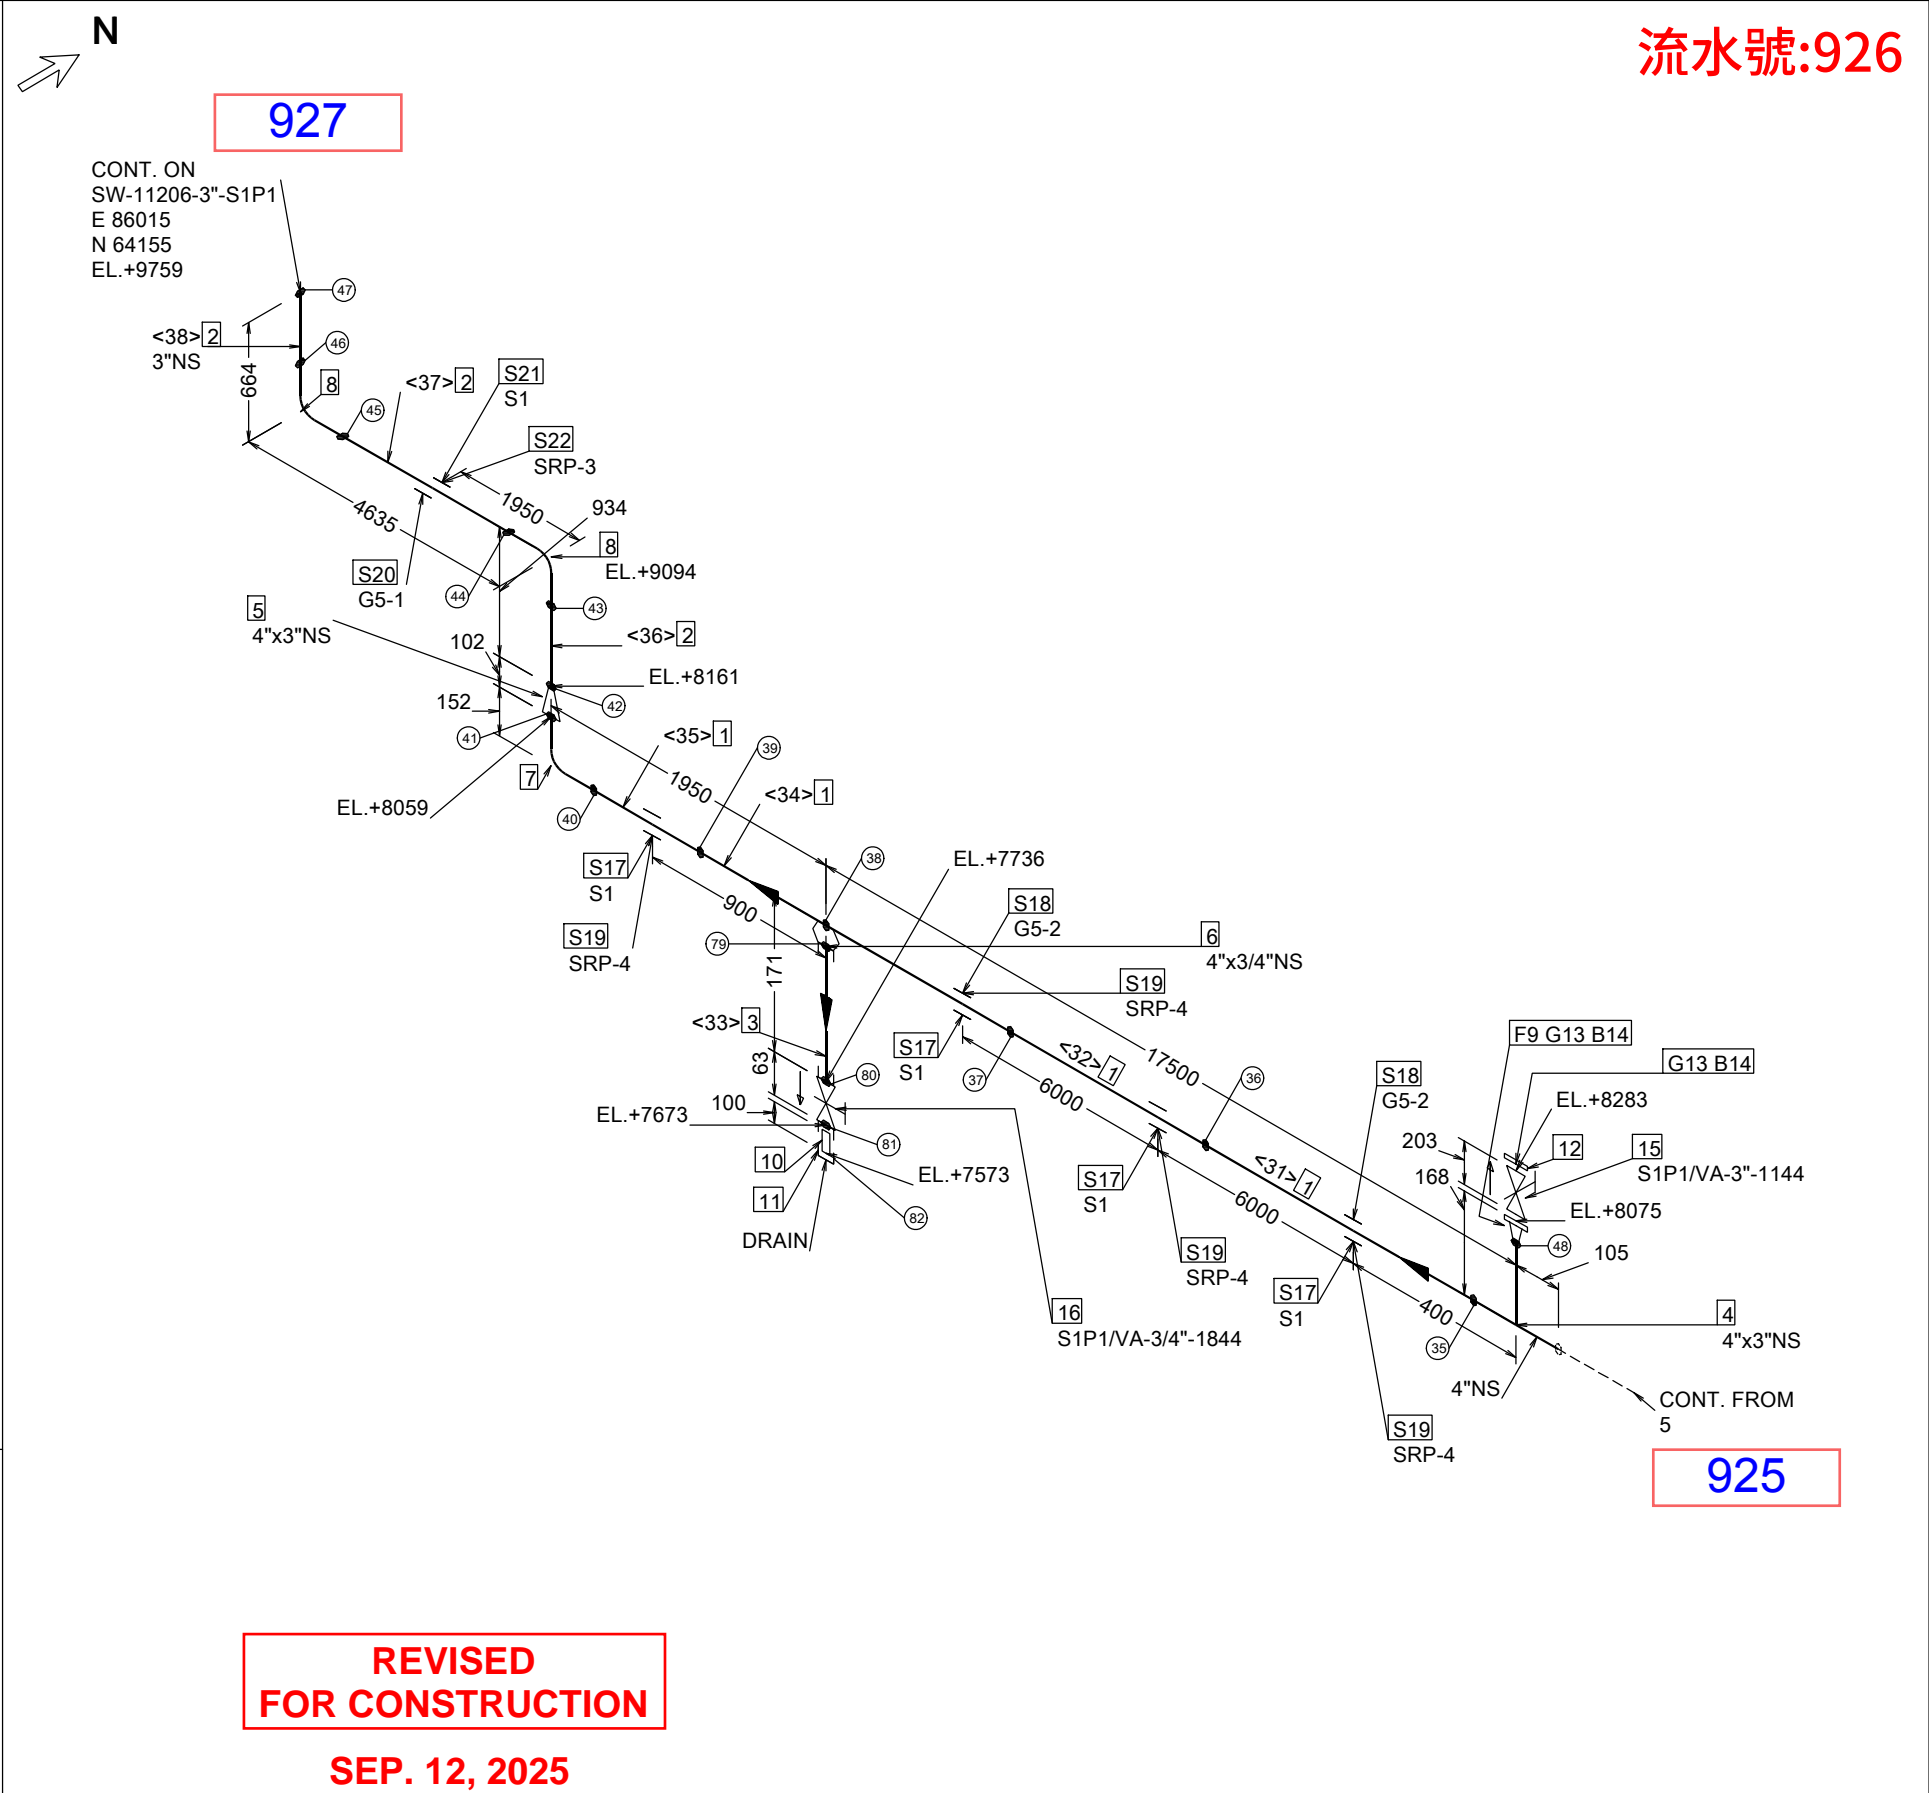

					管線編號 SW-11204-4"-S1P1				
					Eshine 鴻勝化學科技股份有限公司 E-shine Advanced Chemicals Ltd.				
					富台工程股份有限公司 FU-TAI ENGINEERING CO., LTD.				
					管線工程 立體配管圖				
					檔號: SW-11204-S1P1- 6				