

本圖完工後請速歸還

FABRICATION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
PIPE				
1	PIPE A312-TP304 EFW SCH40S BE ASME B36.19M	8	S1P4/P-8"-40S	7.7M

FITTINGS

2	90 ELBOW LR BW A403-WP304 SMLS SCH40S ASME B16.9	8	S1P4/EB-8"X90	4
---	--	---	---------------	---

FLANGES

3	FLANGE WN 150# RF A182-F304 SCH40S BORE ASME B16.5	8	S1P4/FRWN-8"	3
---	--	---	--------------	---

ERECTION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
FITTINGS				
4	SILENCER 150# RF (FURNISHED BY VENDOR) (SILENCER(F).)	8	S1P4/SL-8"	1

GASKETS

5	GASKET 150# RF 4.5 MM THICK 304SS SPIRAL WOUND W/GRAPHITE FILLER W/SS304 OUTER RING ASME B16.20/B16.5	8	S1P4/GR-8"	3
---	---	---	------------	---

BOLTS

6	STUD BOLT A193 GR.B8 W/ TWO HEX. HEAD HEAVY NUT A194 GR.8 ASME B1.1 B18.2.2	3/4	S1P4/BS4-3/4"X110L	24
---	---	-----	--------------------	----

SUPPORTS


7	AUXILIARY SUPPORT (AS9-2-0704)	8	SUP/AS9-2-8"	2
8	U-BOLT (UBG-8)	8	SUP/UBG-8"	2
9	AUXILIARY SUPPORT (AS10-2-0603)	8	SUP/AS10-2-8"	1
10	VERTICAL ANCHOR (VA2-8)	8	SUP/VA2-8"	1
11	SUPPORT REINFORCING PAD (SRPA-8)	8	SUP/SRPA-8"	1

CUT PIPE LENGTH FOR REFERENCE ONLY

PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<1>	872	8		<2>	177	8	
<3>	3192	8		<4>	1420	8	
<5>	2035	8					




HOLD!

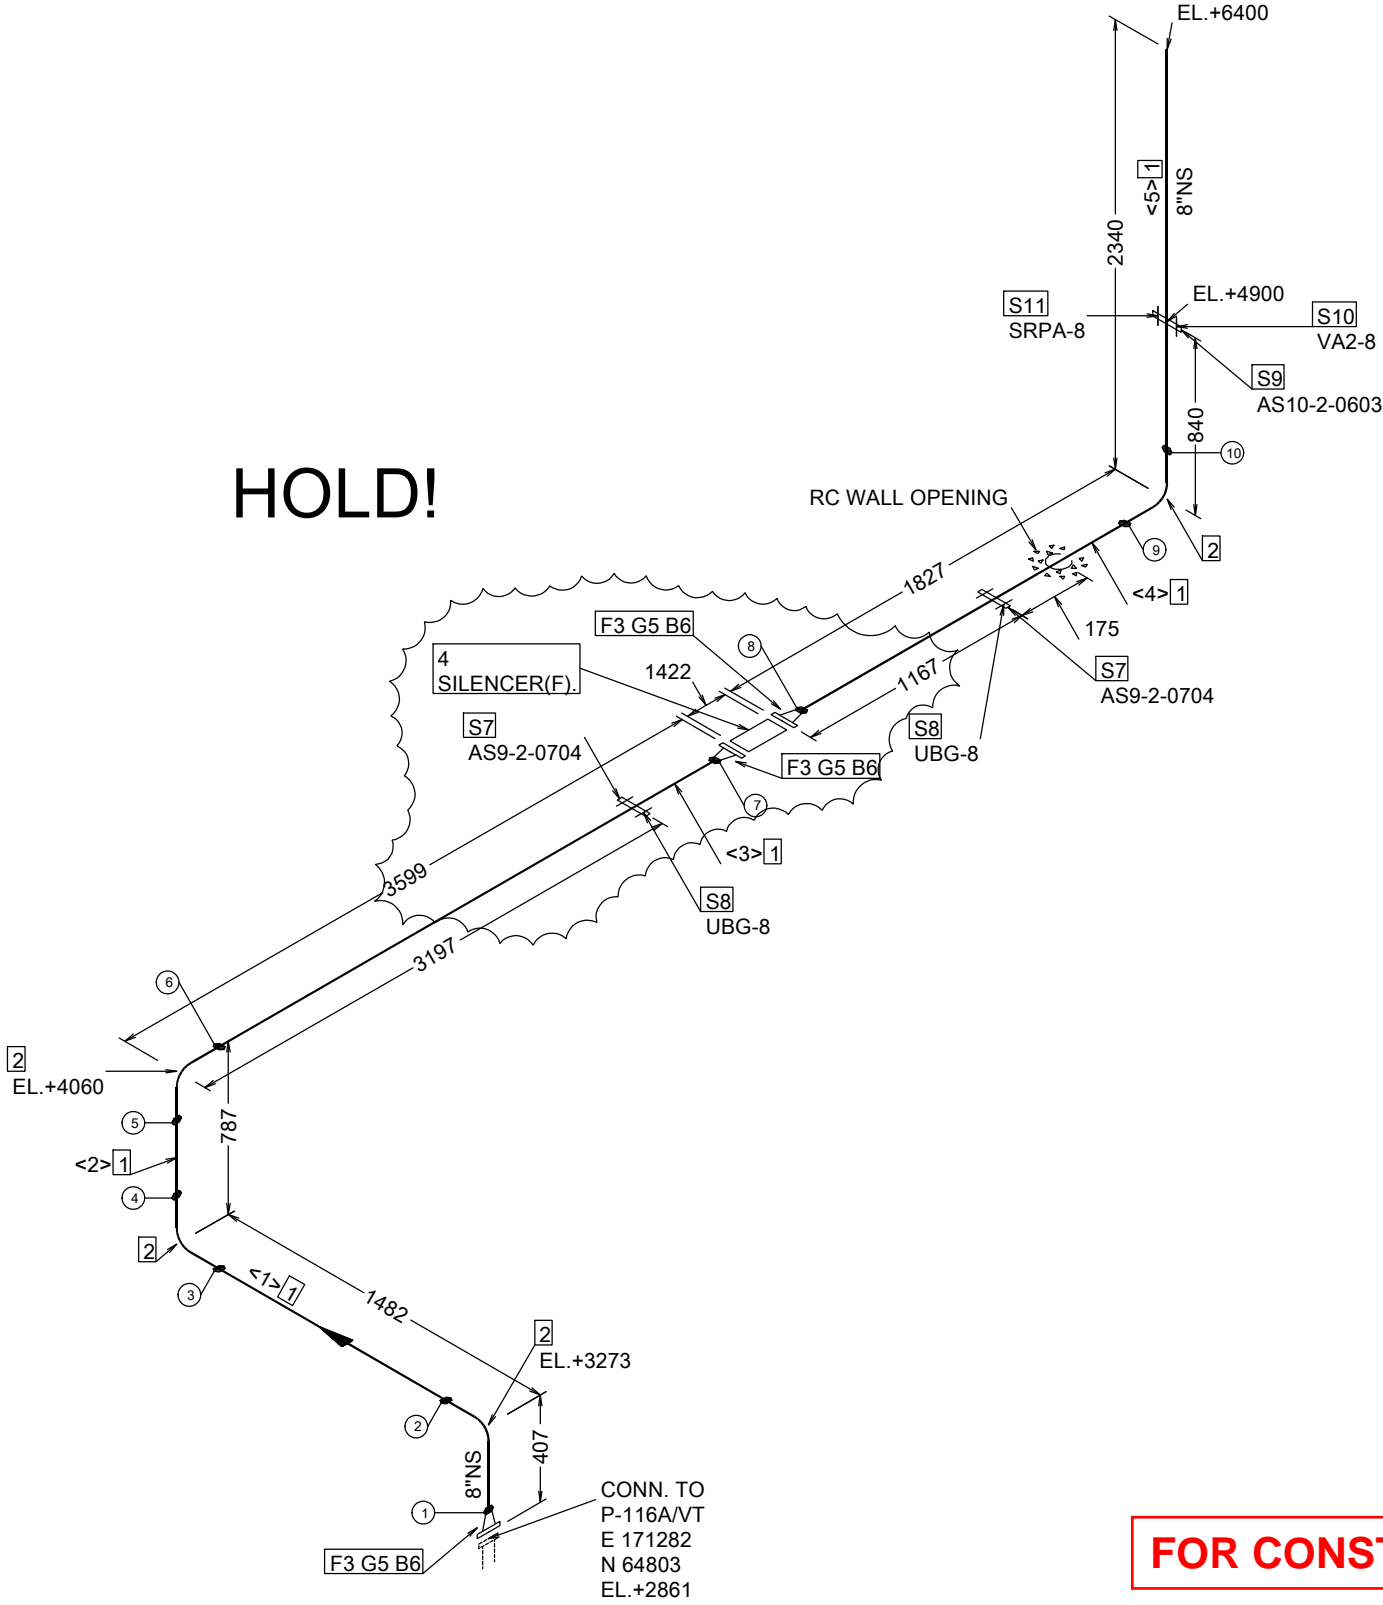

FOR CONSTRUCTION

JUL. 15, 2025

管線編號
VT-90217-8"-S1P4

① 管件序號 <1> 直管編號 [1] 管段編號 & 須設計會驗管線		資料庫 名稱：	工廠焊接 套焊 螺紋銜接 配合現場焊接 配合現場接合點 管支撐 蒸汽追蹤管 — — — — — — — — — —				Eshine 鴻勝化學科技股份有限公司 E-shine Advanced Chemicals Ltd.		
操作壓力: ATM $\frac{KG}{CM^2}$ G	操作溫度: 400 °C	管線等級: S1P4	製 圖	陳郁惟	2025.04.21	會 策			 富台工程股份有限公司 FU-TAI ENGINEERING CO., LTD.
設計壓力: 12.3 $\frac{KG}{CM^2}$ G	設計溫度: 500 °C	保溫(冷)等級:	設 計	陳至鉉	2025.04.21				
試驗基準: AIR	13.53 $\frac{KG}{CM^2}$ G X 60 分	熱追蹤等級:	審 核	陳安誠	2025.04.21				
管路塗裝:	管支撐	管 材 塗 裝 碳鋼及不銹 鋼保溫(冷) 不銹鋼	焊 接 基 準:	認 可	陳逢明		2025.04.21		
焊道: 塗裝:		NDE 抽驗: 10 %	依據圖號: C2418-4-532 C2418-4-531			圖號:		檔號: VT-90217-S1P4- 1	<div>審尾一期 建廠工程</div> <div>管線工程 立體配管圖</div> <div>1 1</div>