


本圖完工後請速歸還

FABRICATION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
PIPE				
1	PIPE A312-TP304 EFW SCH40S BE ASME B36.19M	4	S1P4/P-4"-40S	13.3M
FITTINGS				
2	90 ELBOW LR BW A403-WP304 SMLS SCH40S ASME B16.9	4	S1P4/EB-4"X90	6
FLANGES				
3	FLANGE WN 150# RF A182-F304 SCH40S BORE ASME B16.5	4	S1P4/FRWN-4"	2
ERECTION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
GASKETS				
4	GASKET 150# RF 4.5 MM THICK 304SS SPIRAL WOUND W/GRAPHITE FILLER W/SS304 OUTER RING ASME B16.20/B16.5	4	S1P4/GR-4"	1
BOLTS				
5	STUD BOLT A193 GR.B8 W/ TWO HEX. HEAD HEAVY NUT A194 GR.8 ASME B1.1 B18.2.2	5/8	S1P4/BS4-5/8"X95L	16
SUPPORTS				
6	PIPE SHOE (S1)	4	SUP/S1-4"	3
7	SUPPORT REINFORCING PAD (SRP-4)	4	SUP/SRP-4"	3
8	PIPE GUIDE (G5-2)	4	SUP/G5-2-4"	1
9	AUXILIARY SUPPORT (AS1-2-1506)	4	SUP/AS1-2-4"	1
10	FIELD SUPPORT (FS13-3-0321)	4	SUP/FS13-3-4"	1
11	GROUT (GR2-16)	4	SUP/GR2-4"	1

CUT PIPE LENGTH FOR REFERENCE ONLY

PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<19>	1984	4		<20>	446	4	
<21>	4911	4		<22>	2146	4	
<23>	1096	4		<24>	1603	4	
<25>	1018	4					

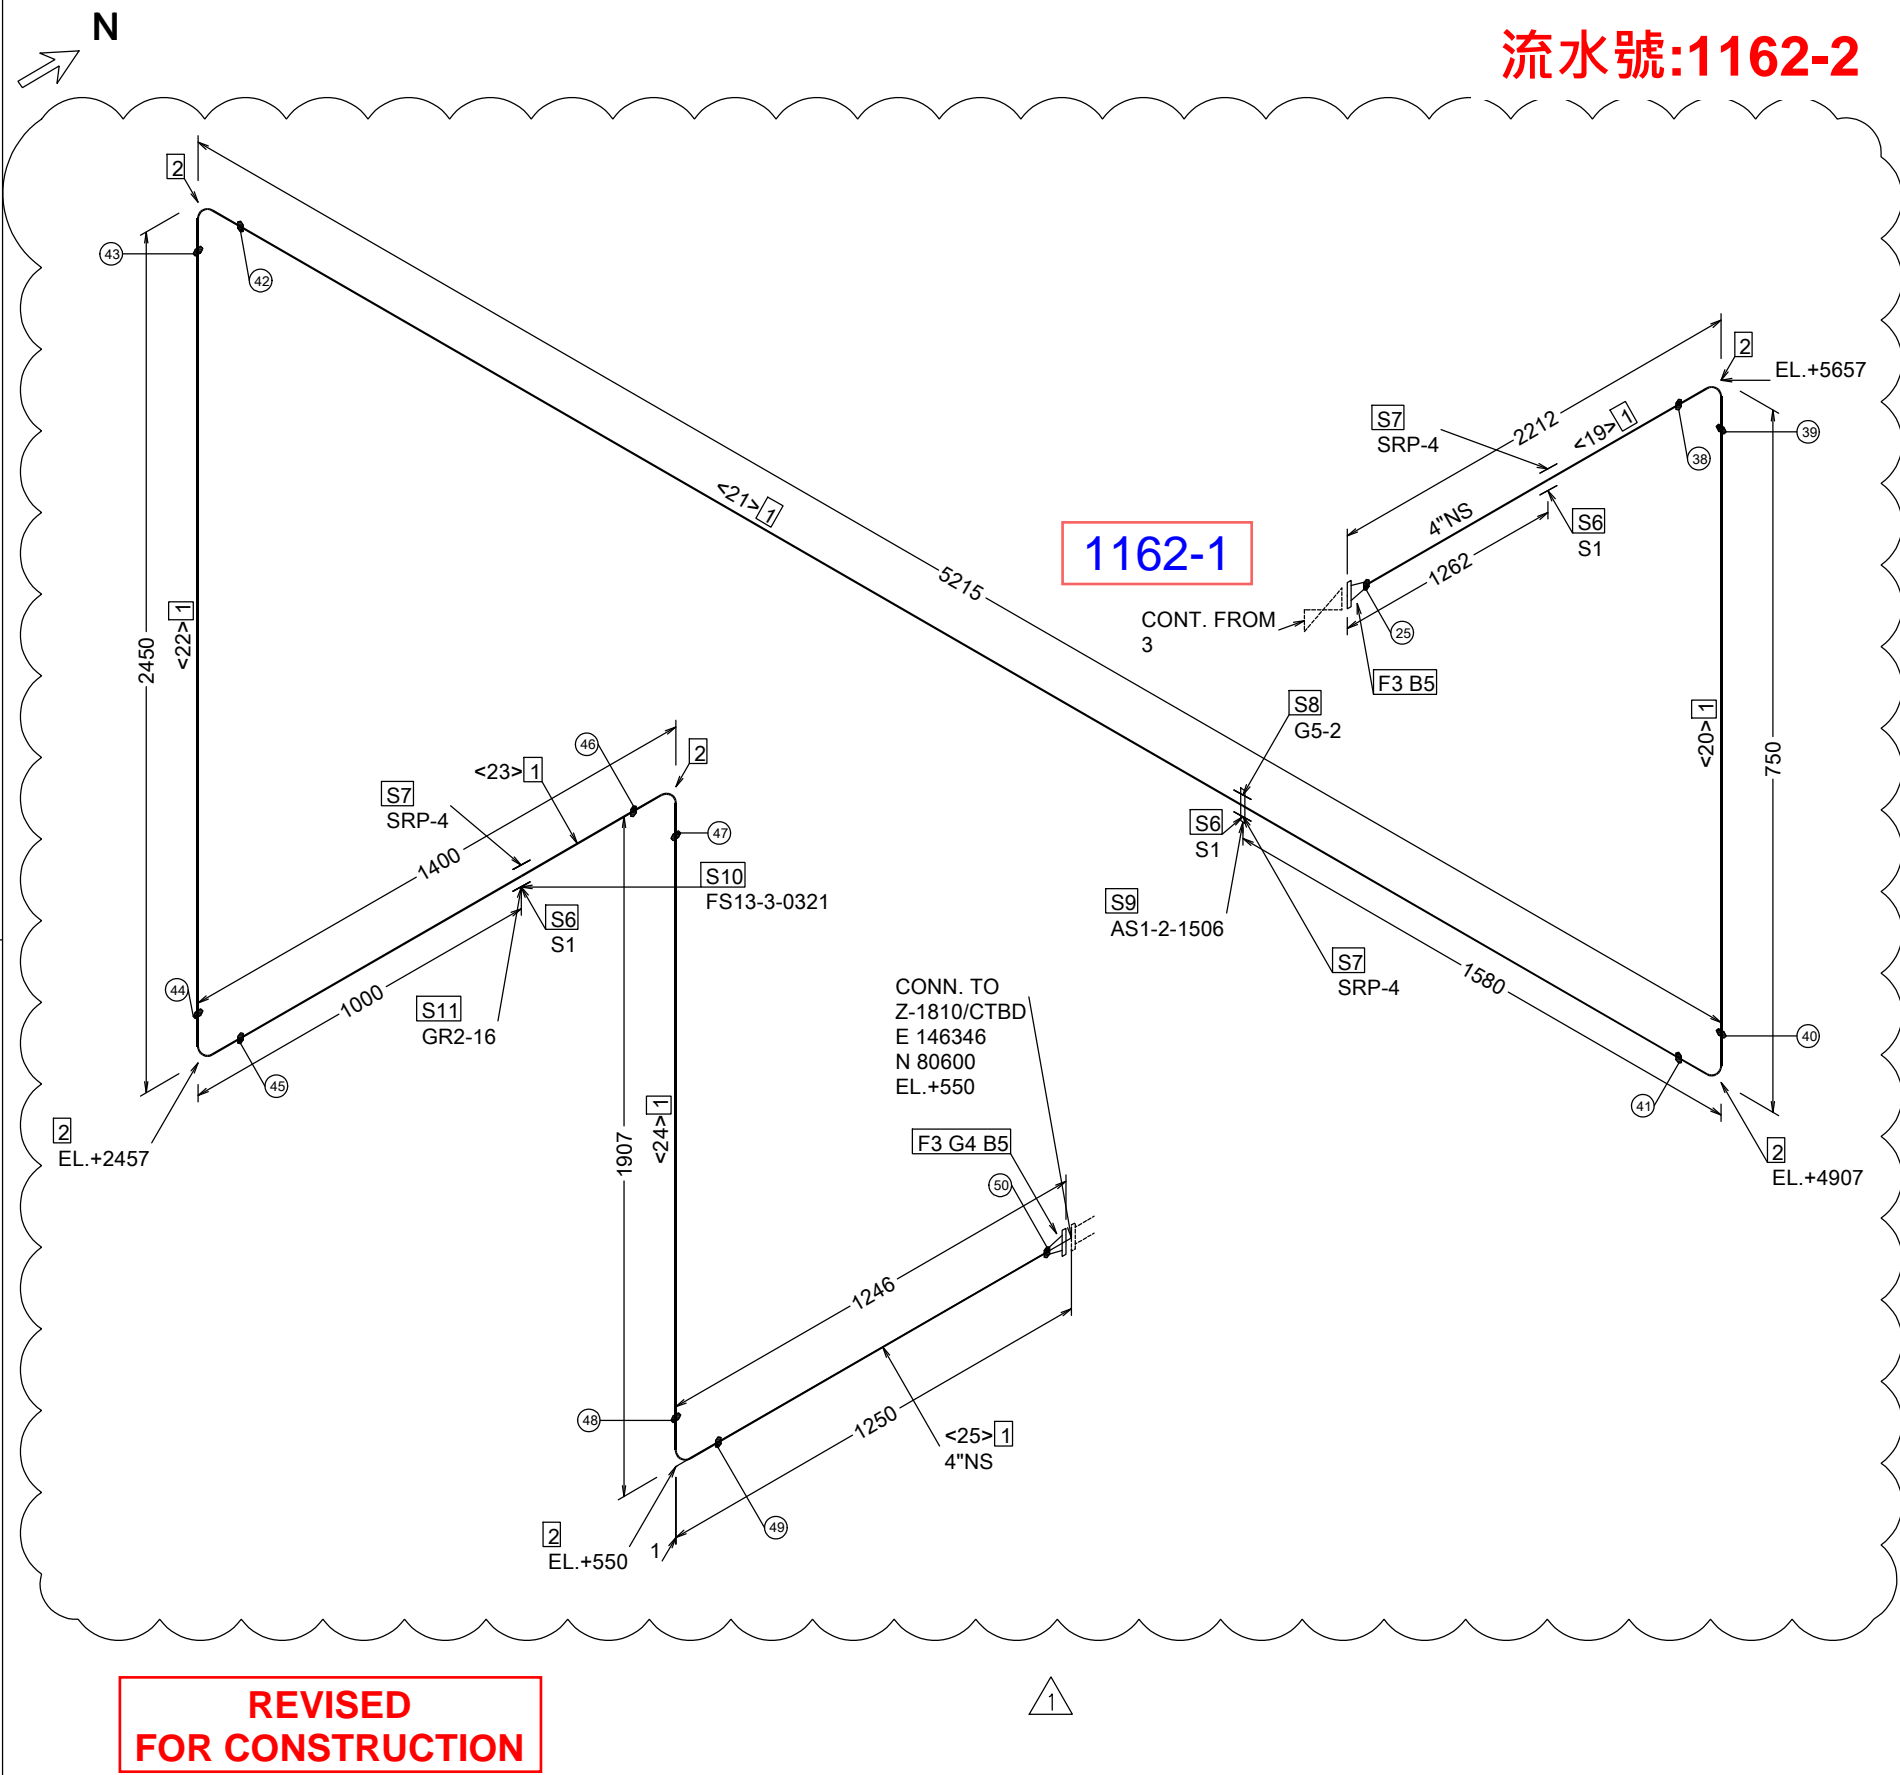

流水號:1162-2

管線編號
WW-14201-4"-S1P4

Eshine 鴻勝化學科技股份有限公司
E-shine Advanced Chemicals Ltd.

富台工程股份有限公司
FU-TAI ENGINEERING CO., LTD.

管線工程
立體配管圖

4
4

檔號: WW-14201-S1P4- 4

① 管件序號 <1> 直管編號 [1] 管段編號
& 須設計會驗管線

資料庫名稱:

工廠焊接 套焊 螺紋銜接 配合現場焊接 配合現場接合點 管支撐 蒸汽追蹤管
— — — — — — — — — —

操作壓力: ATM $\frac{KG}{CM^2}$ G 操作溫度: 32 °C

管線等級: S1P4

製圖 胡庭璋 2025.04.21

會

設計壓力: 3.5 $\frac{KG}{CM^2}$ G 設計溫度: 80 °C

保溫(冷)等級:

設計 林信助 2025.04.21

簽

試驗基準: Air 3.85 $\frac{KG}{CM^2}$ G X 60 分

熱追蹤等級:

審核 陳安誠 2025.04.21

管路塗裝:

焊接基準:

認可 陳逢明 2025.04.21

焊道塗裝:

NDE 抽驗: 10 %

依據圖號: C2418-4-530 C2418-4-534

圖號:

△						
△	2025.09.12	REVISED FOR CONSTRUCTION	林信助	陳逢明		
△	2025.07.03	FOR CONSTRUCTION	林信助	陳逢明		
△	2025.04.21	FOR APPROVAL	林信助	陳逢明		
序次	日期	修改說明	修改	認可		