

本圖完工後請速歸還

FABRICATION MATERIALS


PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
PIPE				
1	PIPE A312-TP304 EFW SCH40S BE ASME B36.19M	2	S1P4/P-2"-40S	22.0M
FITTINGS				
2	90 ELBOW LR BW A403-WP304 SMLS SCH40S ASME B16.9	2	S1P4/EB-2"X90	3
FLANGES				
3	FLANGE WN 150# RF A182-F304 SCH40S BORE ASME B16.5	2	S1P4/FRWN-2"	1
ERECTION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
FLANGES				
4	FLANGE BLIND 150# RF A182-F304 ASME B16.5	2	S1P4/FBR-2"	1
GASKETS				
5	GASKET 150# RF 3.0 MM THICK VIRGIN PTFE ZW#7500 ASME B16.21/B16.5	2	S1P4/GR-2"-ZW#7500	1
BOLTS				
6	STUD BOLT A193 GR.B8 W/ TWO HEX. HEAD HEAVY NUT A194 GR.8 ASME B1.1 B18.2.2	5/8	S1P4/BS4-5/8"X85L	4
SUPPORTS				
7	FLANGE GROUNDING CONDUCTOR (C-501)	2	MISC/C-501	1
8	PIPE SHOE (S1)	2	SUP/S1-2"	8
9	PIPE GUIDE (G5-1)	2	SUP/G5-1-2"	4
10	SUPPORT REINFORCING PAD (SRP-2)	2	SUP/SRP-2"	8

CUT PIPE LENGTH FOR REFERENCE ONLY

PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<1>	5310	2		<2>	1048	2	
<3>	6000	2		<4>	6000	2	
<5>	3578	2					



N

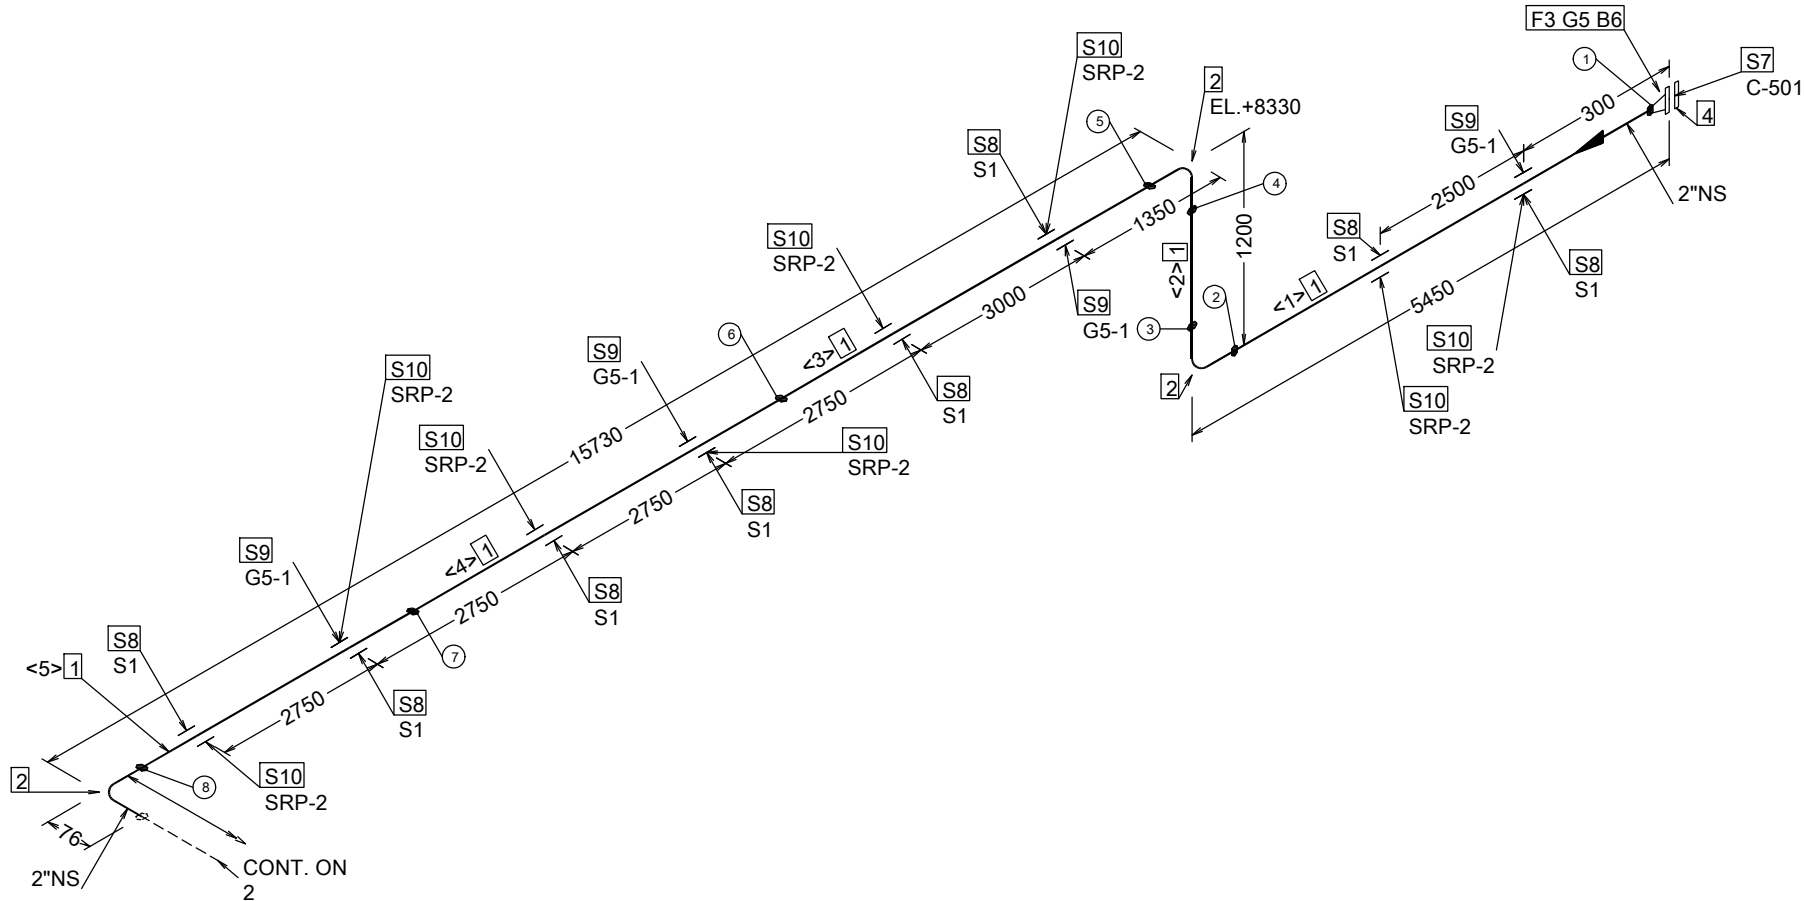

流水號:1241

FOR CONSTRUCTION

JUL. 04, 2025

管線編號  
(2)P-22216-2"-S1P4

Eshine 鴻勝化學科技股份有限公司  
E-shine Advanced Chemicals Ltd.

富台工程股份有限公司  
FU-TAI ENGINEERING CO., LTD.

管線工程  
立體配管圖

1  
6

檔號: (2)P-22216-S1P4- 1

① 管件序號 <1> 直管編號 [1] 管段編號  
& 須設計會驗管線

資料庫  
名稱:

工廠焊接 套焊 螺紋銜接 配合現場焊接 配合現場接合點 管支撐 蒸汽追蹤管  
— — — — —

操作壓力: 3.49  $\frac{KG}{CM^2}G$  操作溫度: 38  $^{\circ}C$

管線等級: S1P4

製圖 陳怡如 2025.05.12

會

設計壓力: 6.9  $\frac{KG}{CM^2}G$  設計溫度: 120  $^{\circ}C$

保溫(冷)等級:

設計 黃炳富 2025.05.12

簽

試驗基準: Air 7.59  $\frac{KG}{CM^2}G$  X 60 分

熱追蹤等級:

審核 陳安誠 2025.05.12

管路塗裝:

焊接基準:

認可 陳逢明 2025.05.12

焊道塗裝:

NDE 抽驗: 10 %

依據圖號: C2418-4-550  
C2418-4-513

圖號:

△

△

△

△

序次

日期

修改說明

修改

認可