


本圖完工後請速歸還

流水號:1007

[illegible]

ERECTION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
<u>FLANGES</u>				
1	FLANGE BLIND 150# RF A182-F304 ASME B16.5	1/2	S1P1/FBR-1/2"	1
<u>GASKETS</u>				
2	GASKET 150# RF 4.5 MM THICK 304SS SPIRAL WOUND W/GRAPHITE FILLER W/SS304 OUTER RING ASME B16.20/B16.5	1/2	S1P1/GR-1/2"	2
<u>BOLTS</u>				
3	STUD BOLT A193 GR.B8 W/ TWO HEX. HEAD HEAVY NUT A194 GR.8 ASME B1.1 B18.2.2	1/2	S1P1/BS4-1/2"X60L	8
<u>VALVES / IN-LINE ITEMS</u>				
4	BALL 150# RF A351-CF8/304SS+PTFE FULL PORT FIRE SAFE WRENCH OPER. ASME B16.34	1/2	S1P1/VA-1/2"-4144	1

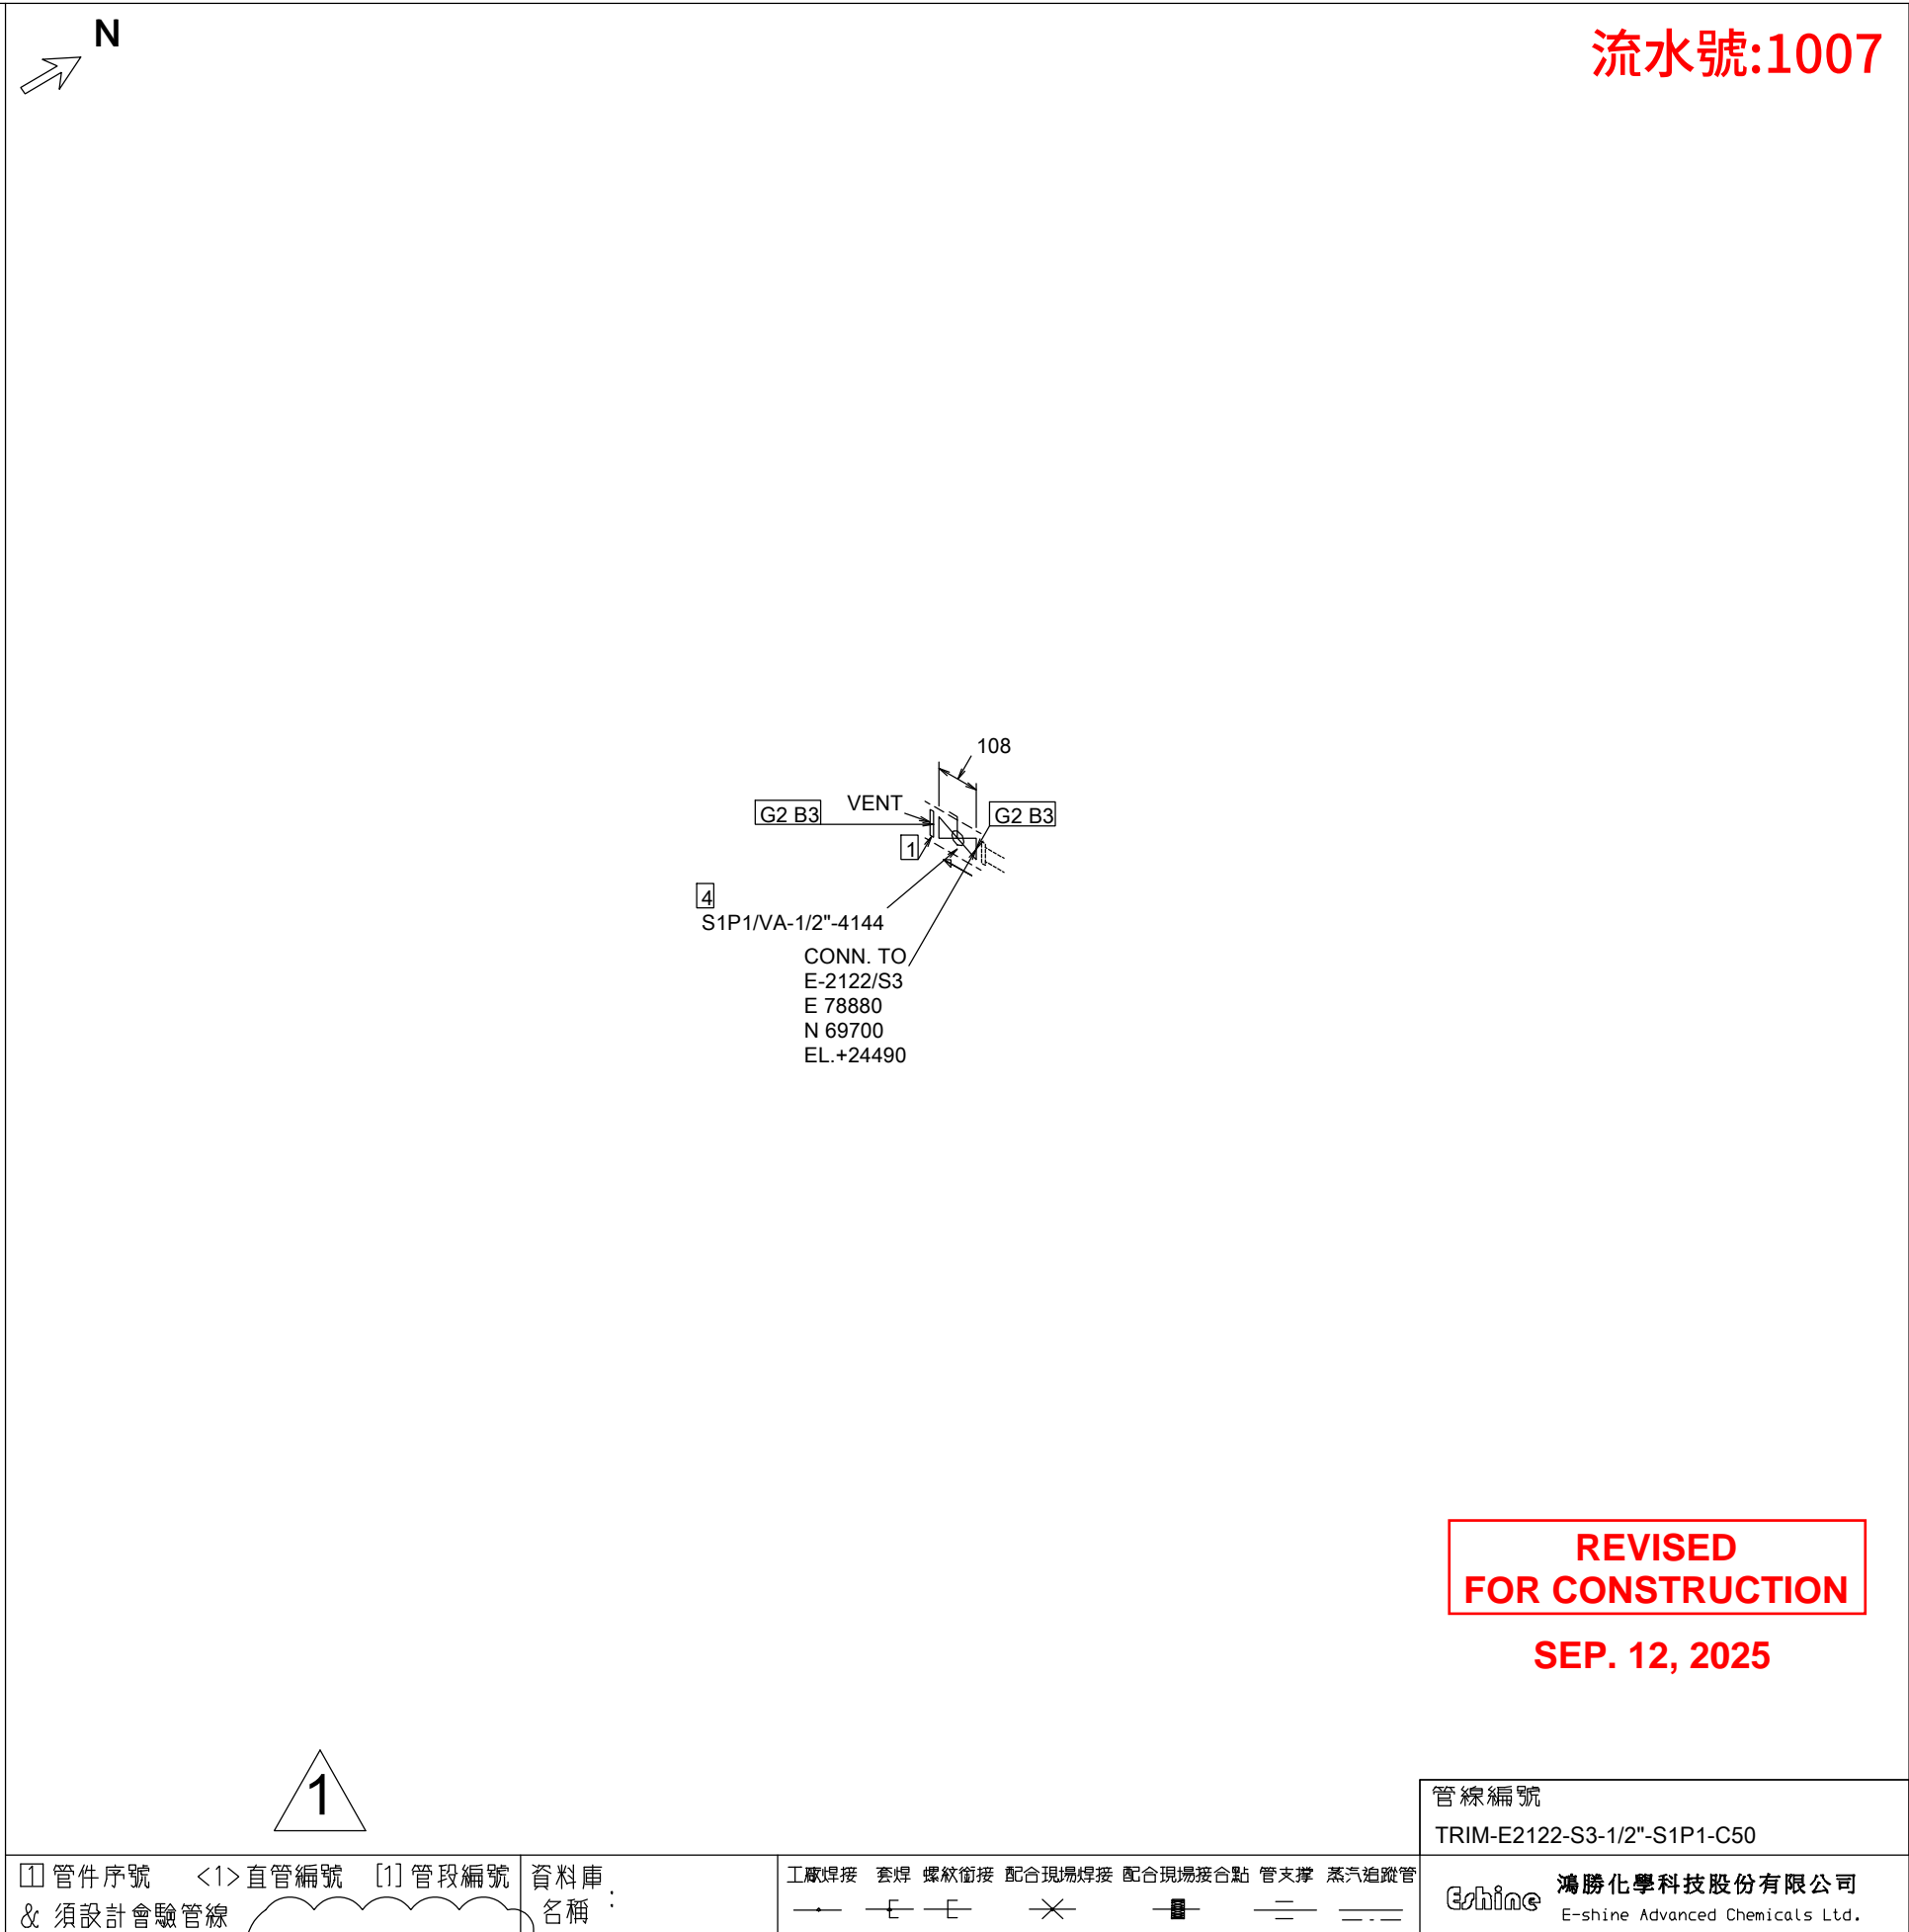

					操作壓力: 2 $\frac{KG}{CM^2}$ G	操作溫度: 8-12 $^{\circ}C$	管線等級: S1P1	製 圖	謝鳳菁	2025.04.21	會 簽			<div>富台工程股份有限公司 FU-TAI ENGINEERING CO., LTD.</div> <div><div>審尾一期 建廠工程</div><div>管線工程</div><div>立體配管圖</div></div> <div>1 1</div>	
	2025.09.12	REVISED FOR CONSTRUCTION	鄧基宏	陳逢明	設計壓力: 8.5 $\frac{KG}{CM^2}$ G	設計溫度: 120 $^{\circ}C$	保溫(冷)等級: C50	設 計	鄧基宏	2025.04.21					
	2025.07.03	FOR CONSTRUCTION	鄧基宏	陳逢明	試驗基準: Air	9.35 $\frac{KG}{CM^2}$ G X 60 分	熱追縱等級:	審 核	陳安誠	2025.04.21					
	2025.04.21	FOR APPROVAL	鄧基宏	陳逢明	管路塗裝:	管 支 撐	管 材 塗 裝	鋼 管 及 不 銹 鋼 保 溫 ($^{\circ}C$): 不 銹 鋼	焊接基準:	認 可		陳逢明	2025.04.21		
序次	日 期	修 改 說 明	修 改	認 可	焊 接 塗 裝:				NDE 抽驗: 10 %	依據圖號: C2418-4-506		圖號:	檔號: TRIM-E2122-S3-S1P1- 1		