


本圖完工後請速歸還

流水號:921

FABRICATION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
PIPE				
1	PIPE A312-TP304 EFW SCH10S BE ASME B36.19M	4	S1P1/P-4"-10S	21.2M
FITTINGS				
2	TEE BW A403-WP304 WELD SCH10S ASME B16.9	4 x 4	S1P1/TB-4"	1
3	REDUCER ECC BW A403-WP304 SMLS SCH10S/SCH40S ASME B16.9	4 x 2	S1P1/RE-4"X2"	1
4	SOCKOLET 3000# SW A182-F304 MSS SP-97	4 x 1.1/2	S1P1/SOL-4"X1.1/2"	1
5	90 ELBOW LR BW A403-WP304 WELD SCH10S ASME B16.9	4	S1P1/EB-4"X90	3
FLANGES				
6	FLANGE WN 150# RF A182-F304 SCH10S BORE ASME B16.5	4	S1P1/FRWN-4"	1
ERECTION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
GASKETS				
7	GASKET 150# RF 4.5 MM THICK 304SS SPIRAL WOUND W/GRAPHITE FILLER W/SS304 OUTER RING ASME B16.20/B16.5	4	S1P1/GR-4"	1
SUPPORTS				
8	SUPPORT REINFORCING PAD (SRP-4)	4	SUP/SRP-4"	4
9	PIPE GUIDE (G5-2)	4	SUP/G5-2-4"	2
10	PIPE SHOE (S1)	4	SUP/S1-4"	4
11	PLATFORM OPENING (PO1-180)	4	SUP/PO1-4"	1
12	GROUT (GR2-16)	4	SUP/GR2-4"	1
13	FIELD SUPPORT (FS13-3-0521)	4	SUP/FS13-3-4"	1

CUT PIPE LENGTH FOR REFERENCE ONLY							
PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<1>	493	4		<2>	941	4	
<3>	4396	4		<4>	3367	4	
<5>	6000	4		<6>	6000	4	

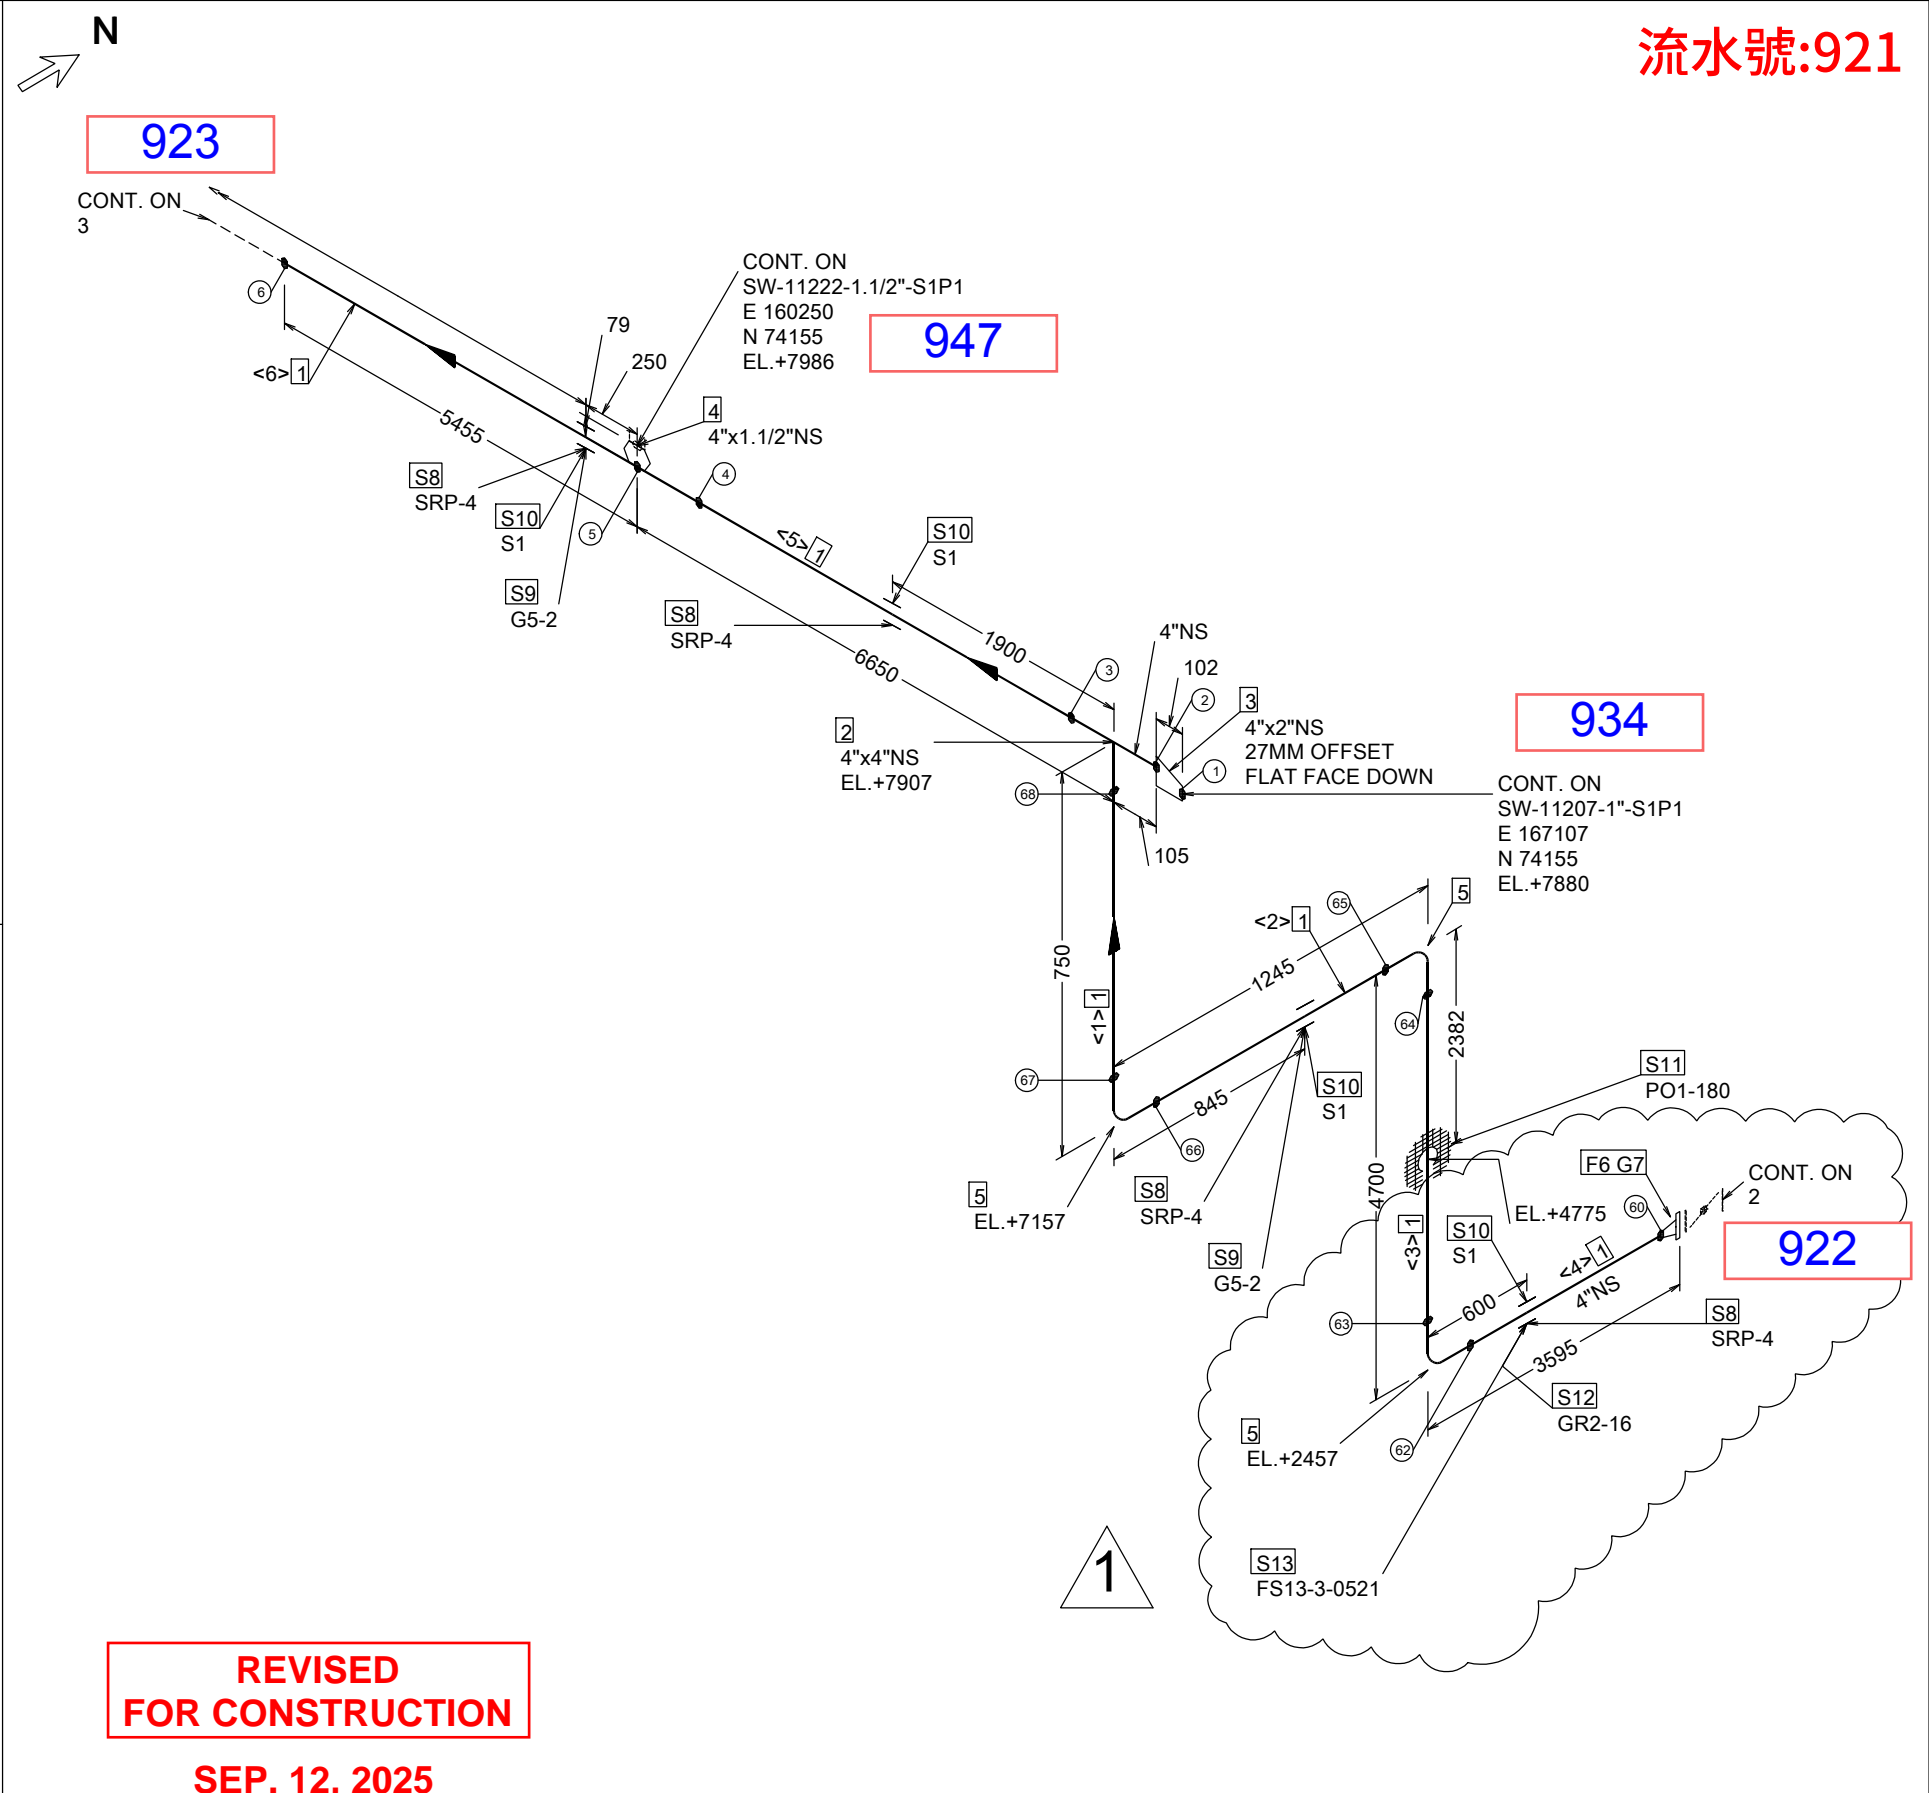

						管線編號 SW-11204-4"-S1P1	
						Eshine 鴻勝化學科技股份有限公司 E-shine Advanced Chemicals Ltd.	
						富台工程股份有限公司 FU-TAI ENGINEERING CO., LTD.	
						管線工程 立體配管圖	
						1 6	
						檔號: SW-11204-S1P1- 1	

△						操作壓力: 6.2 $\frac{KG}{CM^2}$ G	操作溫度: 30 °C	管線等級: S1P1	製圖: 胡庭璋	2025.04.21	會 簽		
△	2025.09.12	REVISED FOR CONSTRUCTION		林信助	陳逢明	設計壓力: 9 $\frac{KG}{CM^2}$ G	設計溫度: 70 °C	保溫(冷)等級:	設計: 林信助	2025.04.21			
△	2025.07.03	FOR CONSTRUCTION		林信助	陳逢明	試驗基準: Air	9.9 $\frac{KG}{CM^2}$ G X 60 分	熱追蹤等級:	審核: 陳安誠	2025.04.21			
△	2025.04.21	FOR APPROVAL		林信助	陳逢明	管路塗裝:	管材料塗裝	焊接基準:	認可: 陳逢明	2025.04.21			
序次	日期	修改說明	修改	認可	焊道塗裝:	管支撐	碳鋼及不銹鋼保溫(冷): 不銹鋼	NDE 抽驗: 10 %	依據圖號: C2418-4-564 C2418-4-552	圖號:			