





分配  

[illegible]

FABRICATION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
<u>PIPE</u>				
1	PIPE A312-TP304 EFW SCH40S BE CNS 6331	2	S1P1F/P-2"-40S	9.4M
<u>FITTINGS</u>				
2	90 ELBOW LR BW A403-WP304 SMLS SCH40S ASME B16.9	2	S1P1F/EB-2"X90	6
<u>FLANGES</u>				
3	FLANGE WN 150# RF A182-F304 SCH40S BORE ASME B16.5	2	S1P1F/FRWN-2"	1
ERECTION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
<u>GASKETS</u>				
4	GASKET 150# RF 4.5 MM THICK 304SS SPIRAL WOUND W/GRAPHITE FILLER W/SS304 OUTER RING ASME B16.20/B16.5	2	S1P1F/GR-2"	4
<u>BOLTS</u>				
5	STUD BOLT A193 GR.B8 W/ TWO HEX. HEAD HEAVY NUT A194 GR.8 ASME B1.1 B18.2.2	5/8	S1P1F/BS4-5/8"X85L	16
<u>VALVES / IN-LINE ITEMS</u>				
6	GATE 150# RF A351-CF8 BB OS &Y RS TRIM 304SS STELLITED FLEXIBLE WEDGE API-600	2	S1P1F/VA-2"-1144	2
<u>INSTRUMENTS</u>				
7	DELUGE VALVE 150# RF (BY OTHER) BDV 605	2		1
<u>SUPPORTS</u>				
8	PICK UP (PU3B-1003)	4	SUP/PU3B-4"	1
9	VERTICAL ANCHOR (VA2-2)	2	SUP/VA2-2"	1
10	SUPPORT REINFORCING PAD (SRPA-2)	2	SUP/SRPA-2"	1
11	AUXILIARY SUPPORT (AS7-2-1204)	2	SUP/AS7-2-2"	1

CUT PIPE LENGTH FOR REFERENCE ONLY							
PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<1>	1996	2		<2>	348	2	
<3>	3048	2		<4>	1348	2	
<5>	788	2		<6>	1798	2	

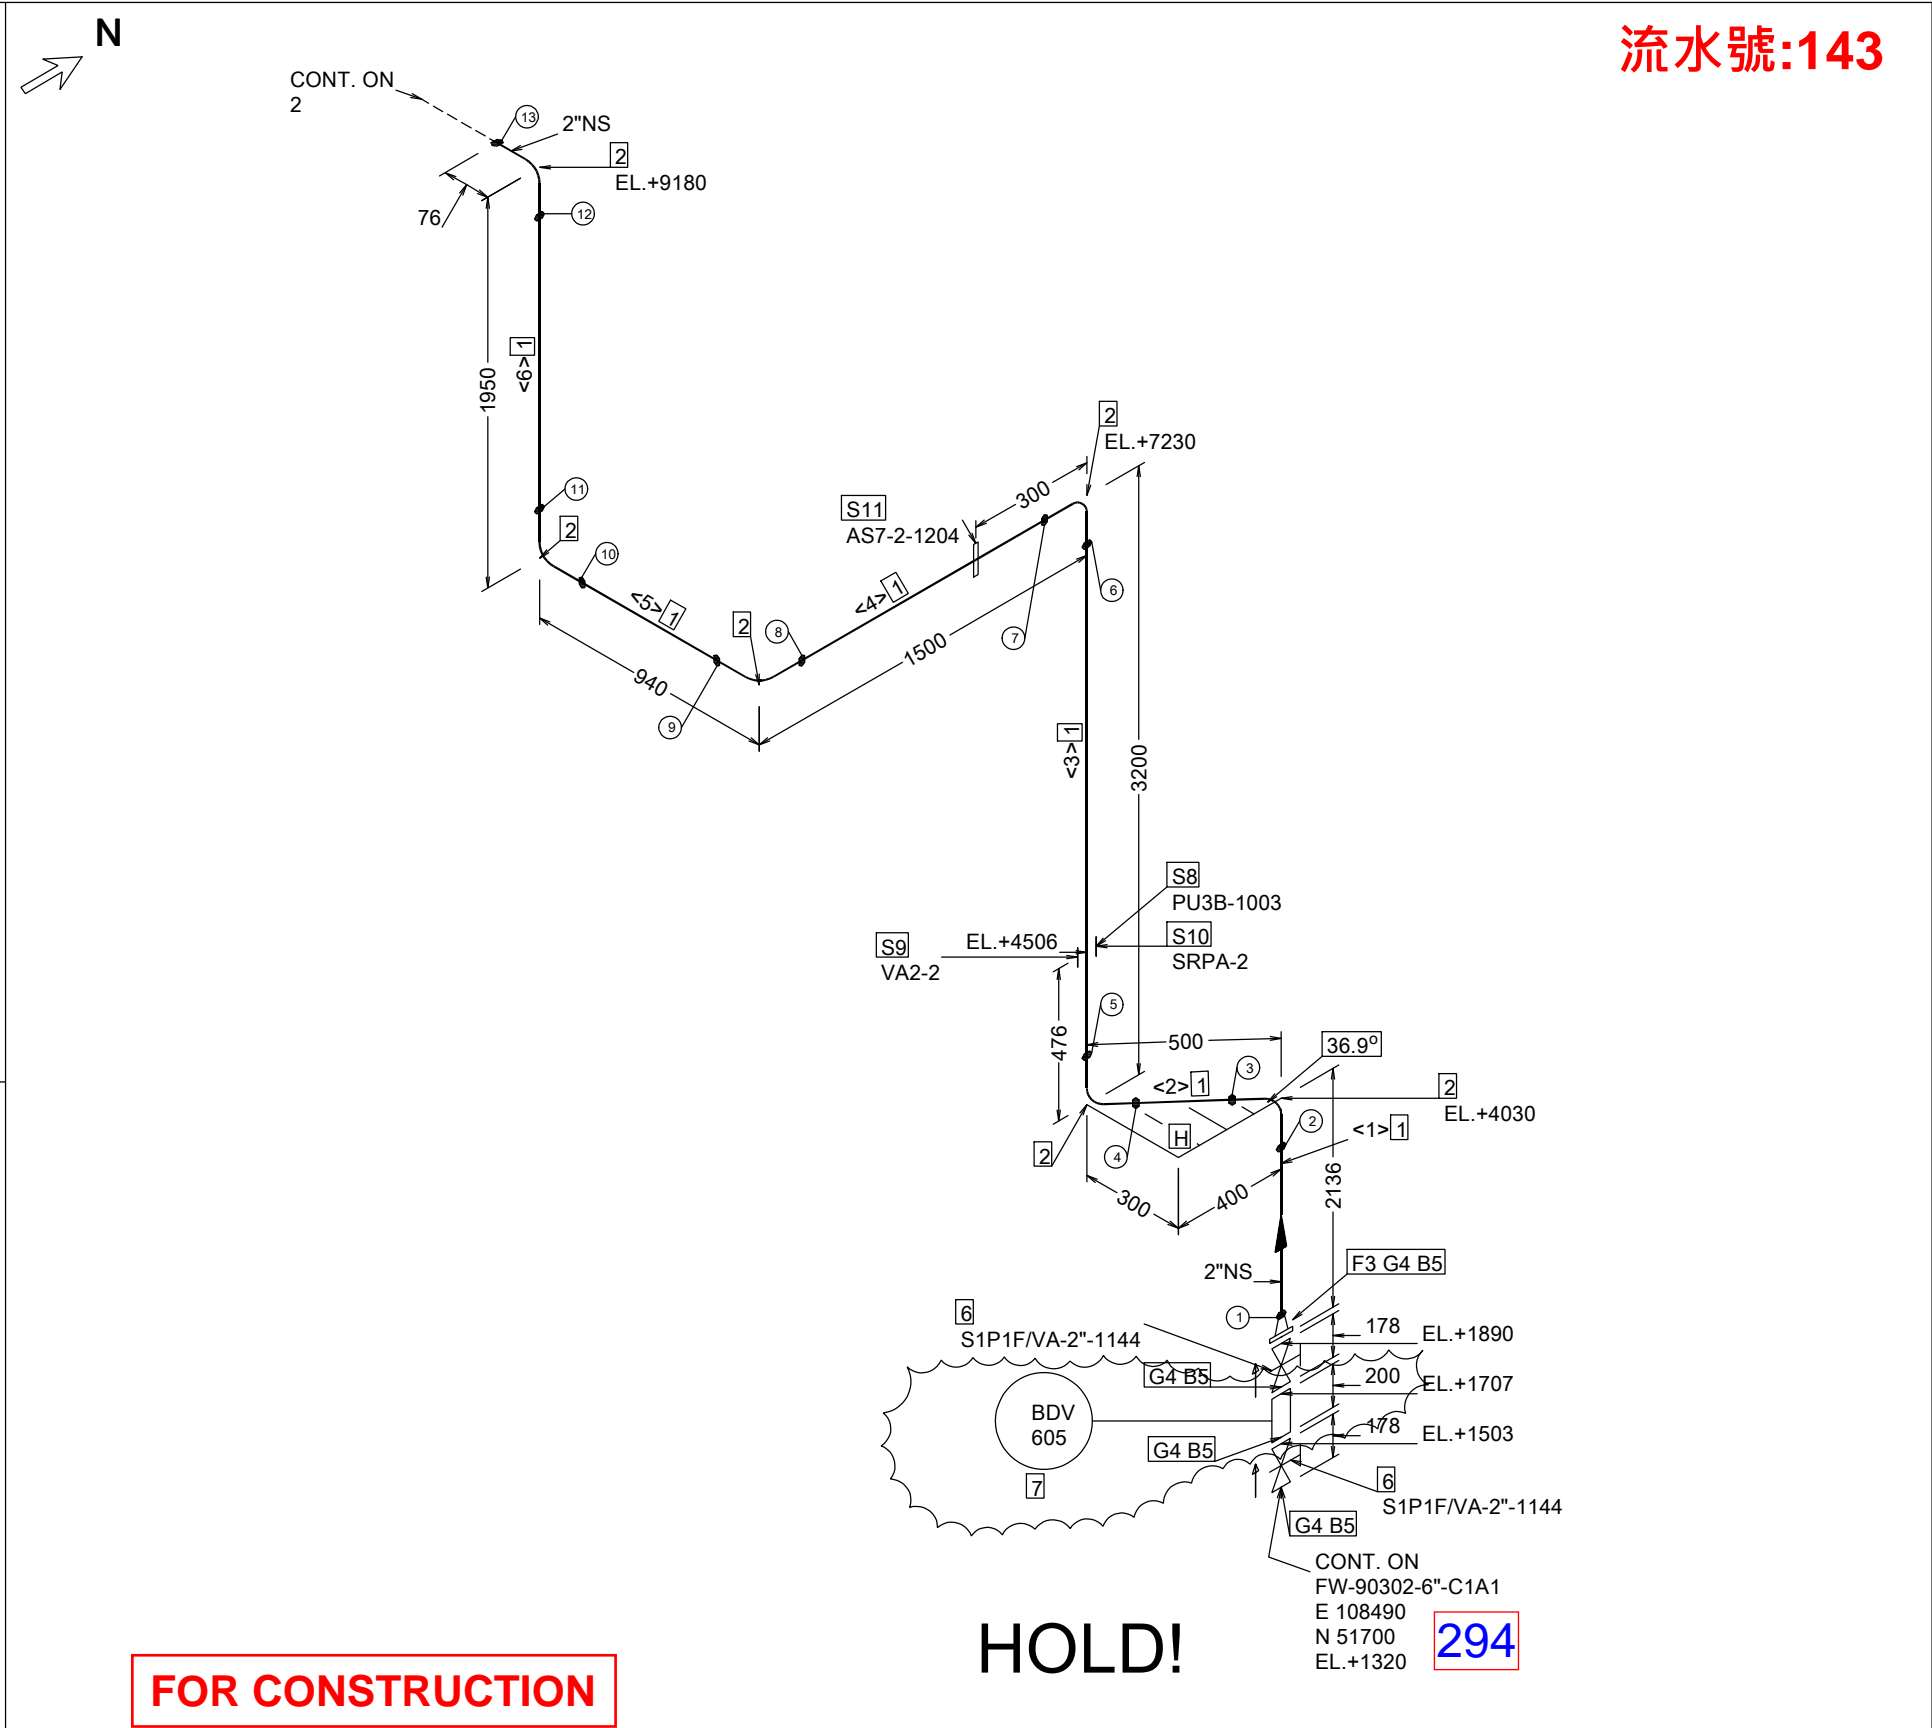

										管線編號 FW-913C05-2"-S1P1F					
□ 管件序號    <1>直管編號    [1] 管段編號 & 須設計會驗管線			資料庫 名稱：		工廠焊接   套焊   螺紋銜接   配合現場焊接   配合現場接合點   管支撐   蒸汽追蹤管 —— —E—E—   —X—   —■—   —=—   —. .					Eshine   鴻勝化學科技股份有限公司 E-shine Advanced Chemicals Ltd.					
操作壓力: 10 $\frac{KG}{CM^2} G$		操作溫度: 25   °C		管線等級:        S1P1F		製   圖		陳郁惟		2025.04.21		會 策	 富台工程股份有限公司 FU-TAI ENGINEERING CO., LTD.		
設計壓力: 12.3 $\frac{KG}{CM^2} G$		設計溫度: 60   °C		保溫(冷)等級:		設   計		陳至鉉		2025.04.21					
試驗基準: Water		18.45 $\frac{KG}{CM^2} G \times 60$ 分		熱追縱等級:		審   核		陳安誠		2025.04.21					
管路塗裝:		管 材 塗 裝		焊接基準:		認   可		陳達明		2025.04.21					
焊道: 塗裝:		鋼及不銹: 鋼保溫(冷): 不銹鋼:		NDE 抽驗:    10 %		依據圖號: C2418-4-512 C2418-4-510				圖號:		檔號: FW-913C05-S1P1F- 1			
										審尾一期 建廠工程		管線工程 立體配管圖		1 4	