本圖完工後請速歸還

流水號:1127

ERECTION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	FLANGES			
1	FLANGE BLIND 150# RF A182-F304 ASME B16.5	1	S1P1/FBR-1"	1
	GASKETS			
2	GASKET 150# RF 4.5 MM THICK 304SS SPIRAL WOUND W/GRAPHITE FILLER W/SS304 OUTER RING ASME B16.20/B16.5	1	S1P1/GR-1"	2
	BOLTS			
3	STUD BOLT A193 GR.B8 W/ TWO HEX. HEAD HEAVY NUT A194 GR.8 ASME B1.1 B18.2.2	1/2	S1P1/BS4-1/2"X65L	8
	VALVES / IN-LINE ITEMS			
4	BALL 150# RF A351-CF8/304SS+PTFE FULL PORT FIRE SAFE WRENCH OPER. ASME B16.34 (VOC<100 vppm)	1	S1P1/VA-1"-4144-E	1
	SUPPORTS			
5	FLANGE GROUNDING CONDUCTOR (C-401)	1	MISC/C-401	2

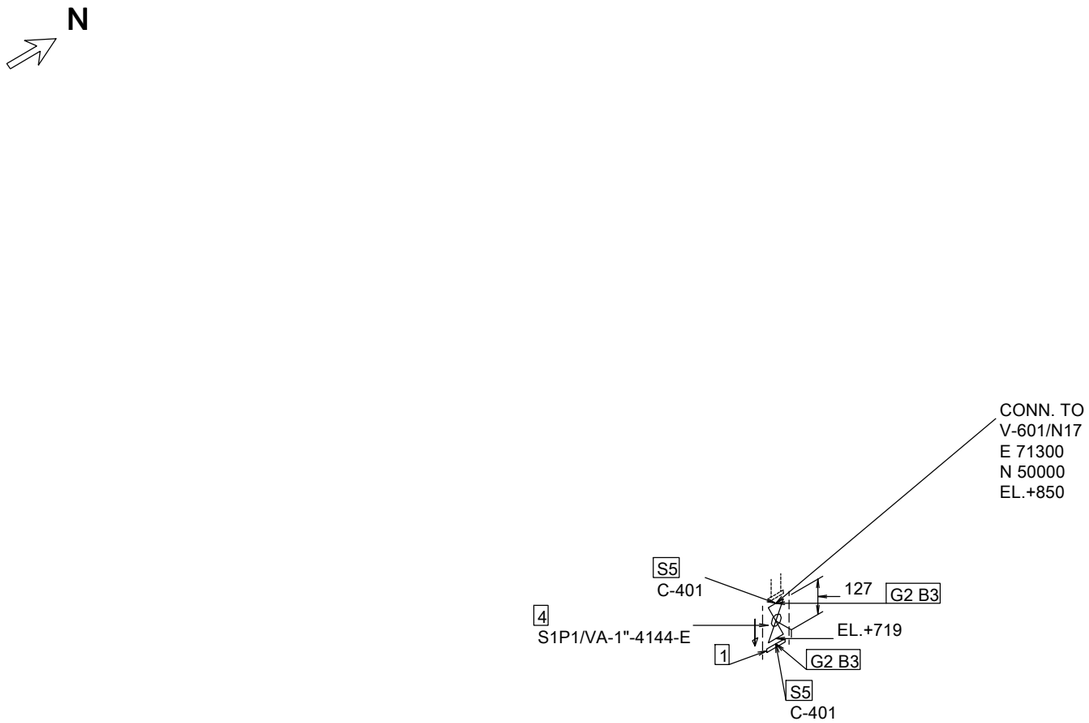

FOR CONSTRUCTION

JUL. 04, 2025

序次	日期	修改說明	修改	認可
0	2025.07.03	FOR CONSTRUCTION	黃炳富	陳逢明
A	2025.04.21	FOR APPROVAL	黃炳富	陳逢明

△ 會簽
分配

[1] 管件序號 <1> 直管編號 [1] 管段編號
& 須設計會驗管線

操作壓力: 0.6 KG/CM²G 操作溫度: -16~38 ℃
設計壓力: 6/HV KG/CM²G 設計溫度: -26~80 ℃
試驗基準: Air 6.6 KG/CM²G X 60 分
管路塗裝:
焊道塗裝:
管支撐
管材塗裝
碳鋼及不銹鋼保溫(冷): :
不銹鋼 :

資料庫名稱:
管線等級: S1P1
保溫(冷)等級: C60
熱追縱等級:
焊接基準:
NDE 抽驗: 10 %

工廠焊接 套焊 螺紋銜接 配合現場焊接 配合現場接合點 管支撐 蒸汽追蹤管

製圖	陳怡如	2025.04.21	會簽
設計	黃炳富	2025.04.21	
審核	陳安誠	2025.04.21	
認可	陳逢明	2025.04.21	

依據圖號: C2418-4-509
圖號:

管線編號
TRIM-V601-N17-1"-S1P1-C60

鴻勝化學科技股份有限公司
E-shine Advanced Chemicals Ltd.

富台工程股份有限公司
FU-TAI ENGINEERING CO., LTD.

崙尾一期建廠工程
管線工程
立體配管圖
1/1

檔號: TRIM-V601-N17-S1P1- 1