


本圖完工後請速歸還

流水號:115

FABRICATION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
PIPE				
1	PIPE A312-TP304 EFW SCH40S BE CNS 6331	2	S1P1F/P-2"-40S	9.7M
2	PIPE A312-TP304 EFW SCH40S PE CNS 6331	1	S1P1F/P-1"-40S	1.5M
FITTINGS				
3	REDUCING TEE BW A403-WP304 SMLS SCH40S ASME B16.9	2 x 1	S1P1F/TB-2"X1"	2
4	SWAGE CONC PLE/TSE(NPT) A403-WP304 SMLS SCH40S/SCH80S MSS-SP-95	1 x 1/2	S1P1F/SC-1"PX1/2"T	2
5	FULL COUPLING 3000# SW A182-F304 ASME B16.11	1	S1P1F/CFS-1"	2
6	FULL COUPLING 3000# SCRD (FNPT) A182-F304 ASME B16.11	1/2	S1P1F/CFT-1/2"	2
ERECTION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
FITTINGS				
7	FOAM NOZZLE MNPT K=2.3	1/2	S1P1F/SN-1/2"	2
SUPPORTS				
8	PIPE SHOE (S1)	2	SUP/S1-2"	3
9	PIPE GUIDE (G5-1)	2	SUP/G5-1-2"	2
10	SUPPORT REINFORCING PAD (SRP-2)	2	SUP/SRP-2"	3

CUT PIPE LENGTH FOR REFERENCE ONLY							
PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<26>	707	1		<27>	2472	2	
<28>	707	1		<29>	6000	2	
<30>	1172	2					

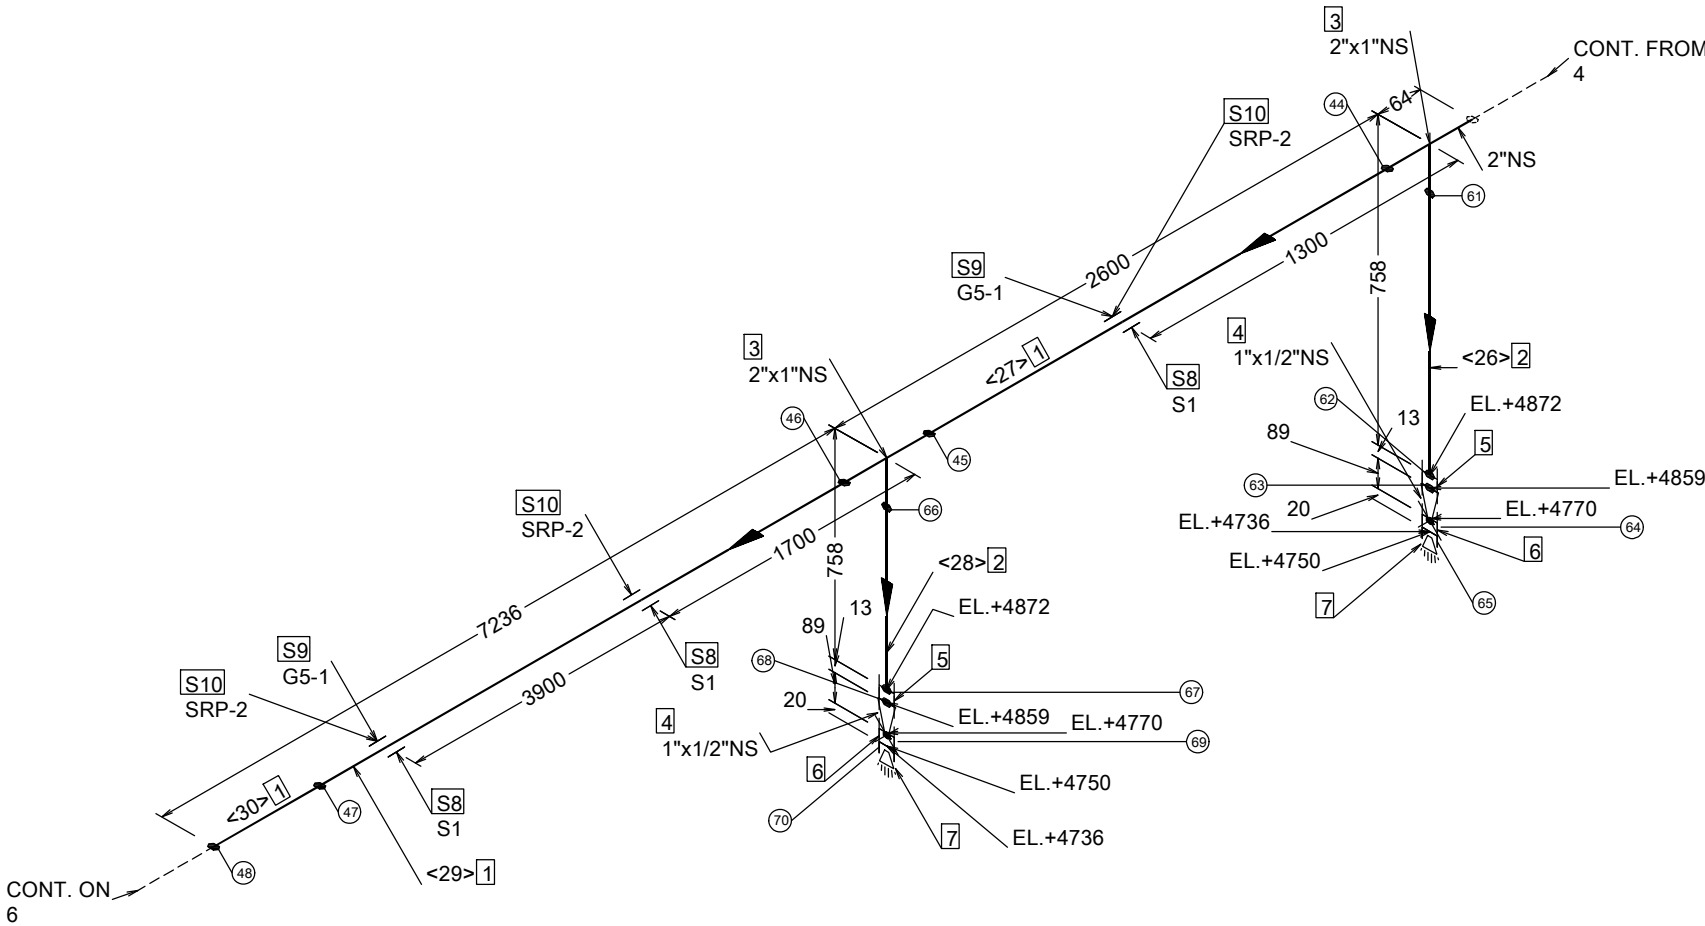

# FOR CONSTRUCTION

**JUL. 15, 2025**

管線編號	
FO-90519-2"-S1P1F	
鴻勝化學科技股份有限公司 E-shine Advanced Chemicals Ltd.	
富台工程股份有限公司 FU-TAI ENGINEERING CO., LTD.	
審尾一期 建廠工程	管線工程 立體配管圖
檔號: FO-90519-S1P1F- 5	

□ 管件序號 <1> 直管編號 [1] 管段編號 & 須設計會驗管線		資料庫 名稱：		工廠焊接 套焊 螺紋銜接 配合現場焊接 配合現場接合點 管支撐 蒸汽追蹤管 	
操作壓力: 10 $\frac{KG}{CM^2} G$	操作溫度: 25 °C	管線等級: S1P1F	製 圖	陳郁惟	2025.04.21
設計壓力: 12.3 $\frac{KG}{CM^2} G$	設計溫度: 60 °C	保溫(冷)等級:	設 計	陳至鉉	2025.04.21
試驗基準: Water	18.45 $\frac{KG}{CM^2} G \times 60$ 分	熱追縱等級:	審 核	陳安誠	2025.04.21
管路塗裝:	管 管 材 塗 裝	焊接基準:	認 可	陳逢明	2025.04.21
焊道: 塗裝:	碳鋼及不銹: 鋼保溫(冷): 不銹鋼:	NDE 抽驗: 10 %	依據圖號: C2418-4-512 C2418-4-545		圖號:

△				
△				
⊙	2025.07.15	FOR CONSTRUCTION	陳至鉉	陳逢明
△	2025.04.21	FOR APPROVAL	陳至鉉	陳逢明
序次	日 期	修 改 說 明	修 改	認 可