


本圖完工後請速歸還

流水號:177



FABRICATION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
PIPE				
1	PIPE A312-TP304 EFW SCH40S BE ASME B36.19M	3	S1P4/P-3"-40S	23.9M
2	PIPE A312-TP304 EFW SCH40S PE ASME B36.19M	3/4	S1P4/P-3/4"-40S	0.2M
FITTINGS				
3	SOCKOLET 3000# SW A182-F304 MSS SP-97	3 x 3/4	S1P4/SOL-3"X3/4"	2
4	90 ELBOW LR BW A403-WP304 SMLS SCH40S ASME B16.9	3	S1P4/EB-3"X90	1
ERECTION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
FITTINGS				
5	NIPPLE (L=100MM) TOE(NPT) A312-TP304 SMLS SCH80S ASME B36.19M	3/4	S1P4/NIP-3/4"X100LXTOE	1
6	CAP 3000# SCR D (FNPT) A182-F304 ASME B16.11	3/4	S1P4/CT-3/4"	1
VALVES / IN-LINE ITEMS				
7	GATE 800# SW/SCR D(NPT) A182-F304 BB OS &Y RS TRIM 304SS STELLITED SOLID WEDGE API-602	3/4	S1P4/VA-3/4"-1U44	1
8	GATE 800# SW A182-F304 BB OS &Y RS TRIM 304SS STELLITED SOLID WEDGE API-602	3/4	S1P4/VA-3/4"-1844	1
SUPPORTS				
9	PIPE SHOE (S1)	3	SUP/S1-3"	5
10	SUPPORT REINFORCING PAD (SRP-3)	3	SUP/SRP-3"	5
11	PIPE GUIDE (G5-1)	3	SUP/G5-1-3"	2

CUT PIPE LENGTH FOR REFERENCE ONLY							
PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS	PIECE NO	CUT LENGTH	N.S. (INS)	REMARKS
<15>	100	3/4		<16>	100	3/4	
<17>	6000	3		<18>	6000	3	
<19>	6000	3		<20>	5817	3	

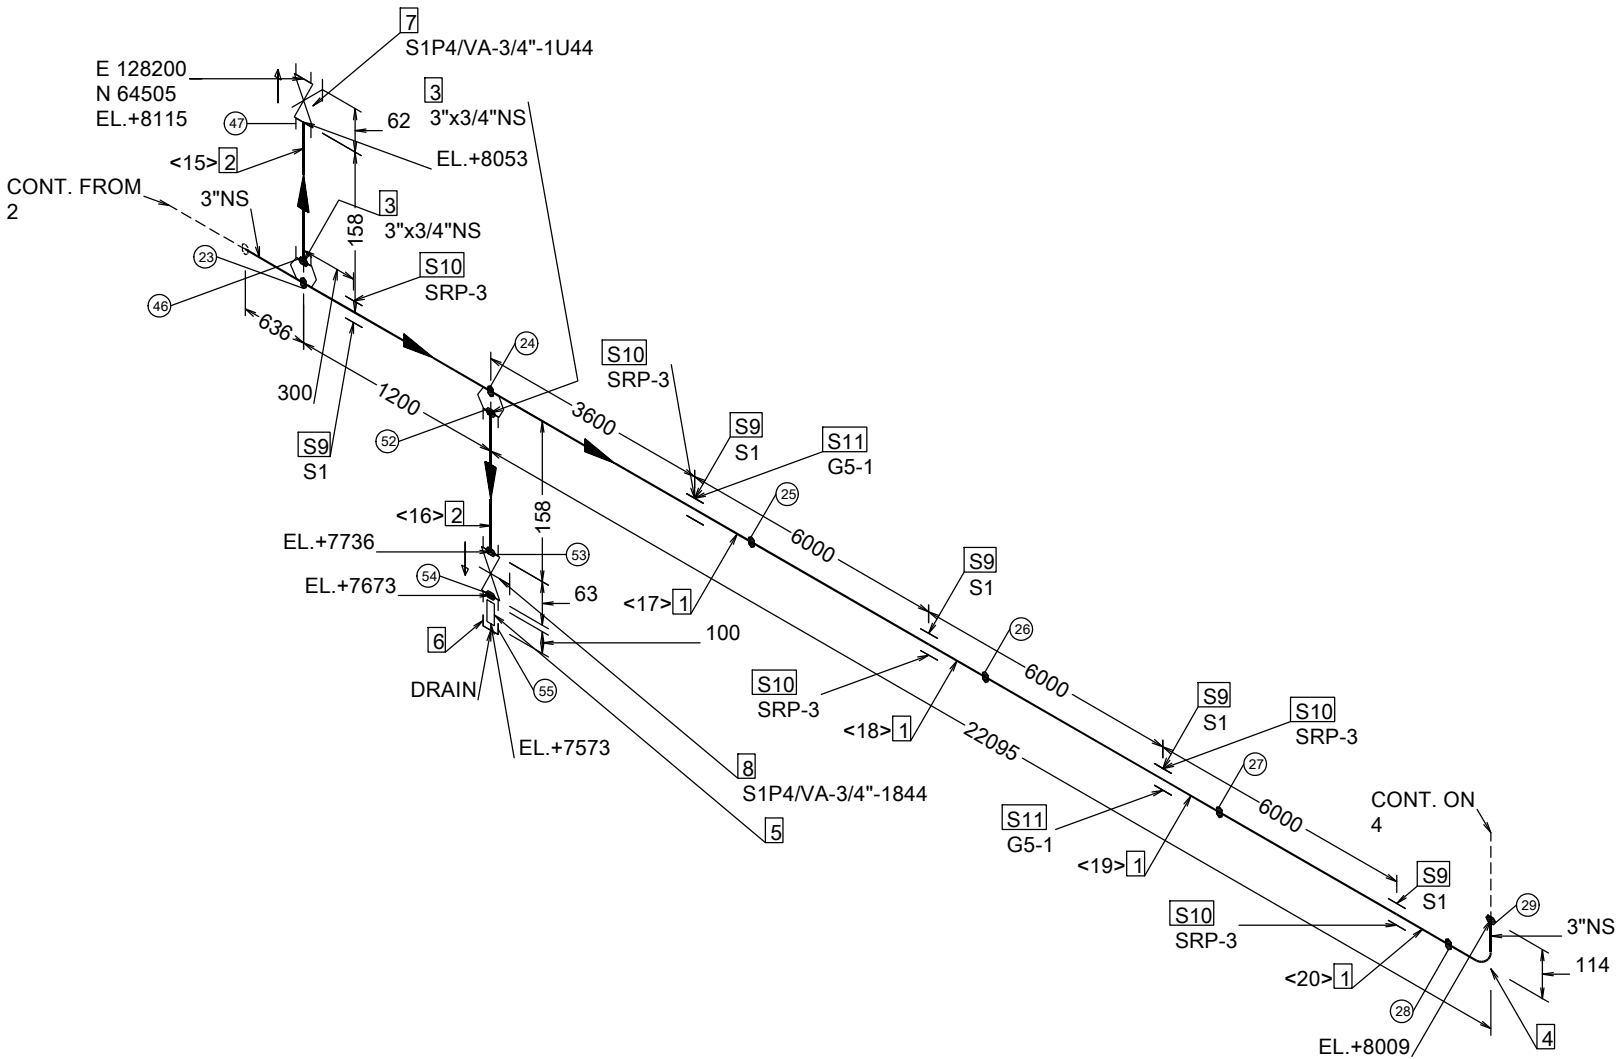

FOR CONSTRUCTION  
JUL. 04, 2025

							管線編號 IA-16201-3"-S1P4	
							E-shine 鴻勝化學科技股份有限公司 E-shine Advanced Chemicals Ltd.	
							富台工程股份有限公司 FU-TAI ENGINEERING CO., LTD.	
							管線工程 立體配管圖	
							3 4	
							檔號: IA-16201-S1P4- 3	

[1] 管件序號 <1> 直管編號 [1] 管段編號 & 須設計會驗管線		資料庫名稱:	工廠焊接 套焊 螺紋銜接 配合現場焊接 配合現場接合點 管支撐 蒸汽追蹤管	
操作壓力: 6.5 $\frac{KG}{CM^2}$ G	操作溫度: AMB °C	管線等級: S1P4	製圖: 胡庭璋	2025.04.21
設計壓力: 9 $\frac{KG}{CM^2}$ G	設計溫度: 80 °C	保溫(冷)等級:	設計: 林信助	2025.04.21
試驗基準: Air	9.9 $\frac{KG}{CM^2}$ G X 60 分	熱追縱等級:	審核: 陳安誠	2025.04.21
管路塗裝:	管材料塗裝	焊接基準:	認可: 陳逢明	2025.04.21
焊道: 塗裝:	碳鋼及不銹鋼保溫(冷): 不銹鋼	NDE 抽驗: 10 %	依據圖號: C2418-4-552 C2418-4-535	圖號:

△								
△								
△	2025.07.03	FOR CONSTRUCTION	林信助	陳逢明				
△	2025.04.21	FOR APPROVAL	林信助	陳逢明				
序次	日期	修改說明	修改	認可				