


本圖完工後請速歸還

流水號:998

[illegible]

ERECTION MATERIALS				
<u>PT NO</u>	<u>COMPONENT DESCRIPTION</u>	<u>N.S. (INS)</u>	<u>ITEM CODE</u>	<u>QTY</u>
<u>FLANGES</u>				
1	FLANGE BLIND 150# RF A182-F304 ASME B16.5	1/2	S1P1/FBR-1/2"	1
<u>GASKETS</u>				
2	GASKET 150# RF 4.5 MM THICK 304SS SPIRAL WOUND W/GRAPHITE FILLER W/SS304 OUTER RING ASME B16.20/B16.5	1/2	S1P1/GR-1/2"	2
<u>BOLTS</u>				
3	STUD BOLT A193 GR.B8 W/ TWO HEX. HEAD HEAVY NUT A194 GR.8 ASME B1.1 B18.2.2	1/2	S1P1/BS4-1/2"X60L	8
<u>VALVES / IN-LINE ITEMS</u>				
4	BALL 150# RF A351-CF8/304SS+PTFE FULL PORT FIRE SAFE WRENCH OPER. ASME B16.34	1/2	S1P1/VA-1/2"-4144	1

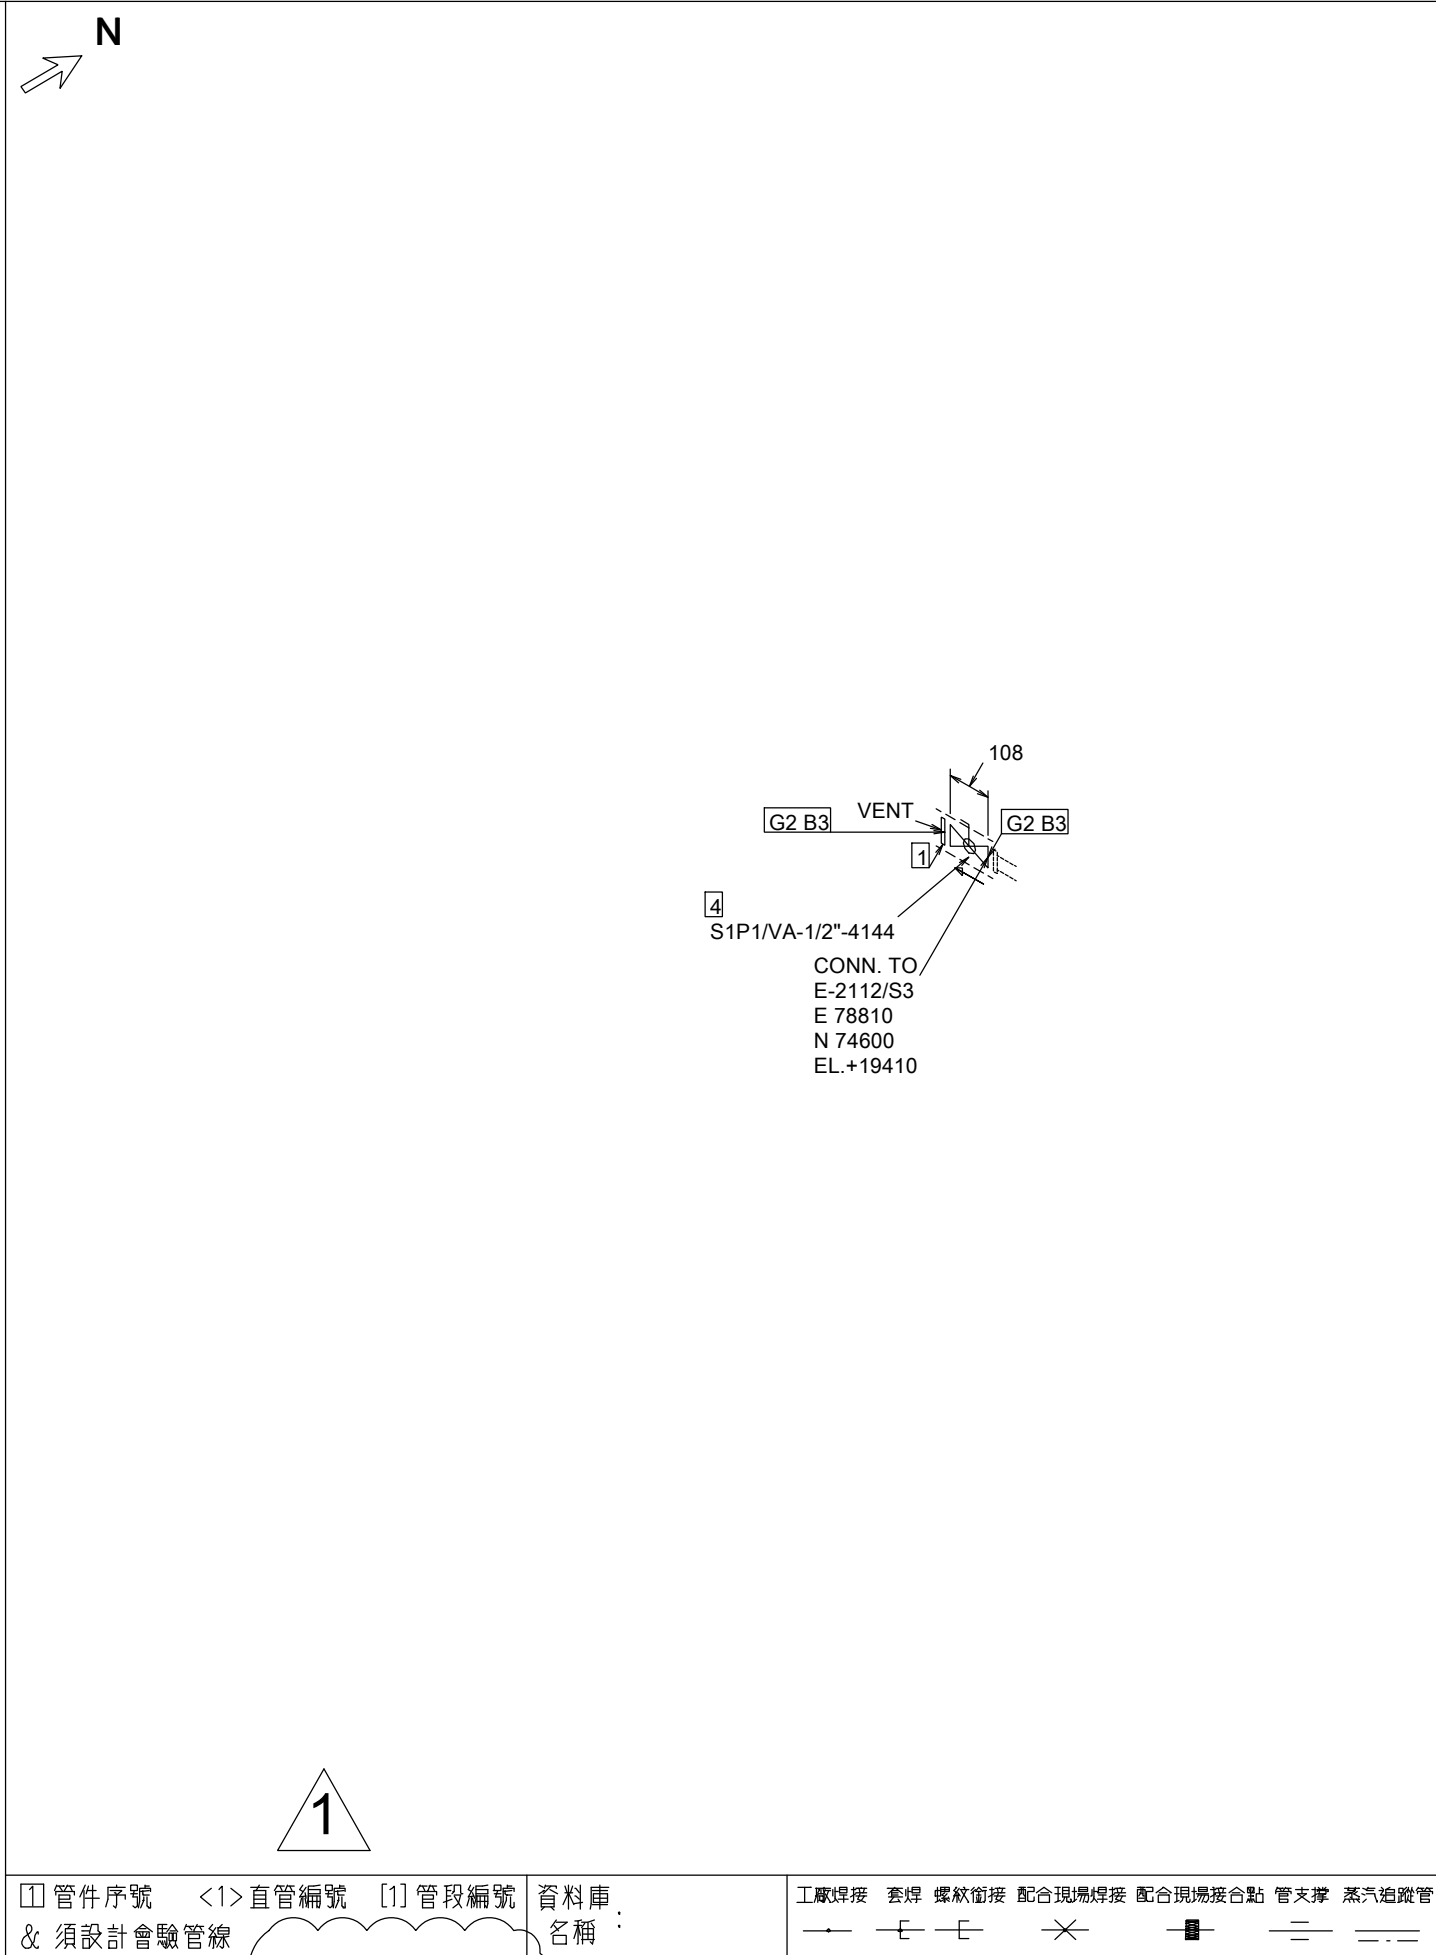

**REVISED  
FOR CONSTRUCTION**

**SEP. 12, 2025**

<div><div>1</div></div>										管線編號 TRIM-E2112-S3-1/2"-S1P1-C50	
□ 管件序號    <1> 直管編號    [1] 管段編號 & 須設計會驗管線				資料庫名稱:		工廠焊接   套焊   螺紋銜接   配合現場焊接   配合現場接合點   管支撐   蒸汽追蹤管 —					