


本圖完工後請速歸還

ERECTION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
FLANGES				
1	FLANGE BLIND 150# RF A182-F304 ASME B16.5	3	S1P4/FBR-3"	1
GASKETS				
2	GASKET 150# RF 3.0 MM THICK VIRGIN PTFE ZW#7500 ASME B16.21/B16.5	3	S1P4/GR-3"-ZW#7500	2
BOLTS				
3	STUD BOLT A193 GR.B8 W/ TWO HEX. HEAD HEAVY NUT A194 GR.8 ASME B1.1 B18.2.2	5/8	S1P4/BS4-5/8"X95L	8
VALVES / IN-LINE ITEMS				
4	BALL 150# RF A351-CF8/304SS+PTFE FULL PORT FIRE SAFE WRENCH OPER. ASME B16.34 (VOC<100 vppm)	3	S1P4/VA-3"-4144-E	1
SUPPORTS				
5	FLANGE GROUNDING CONDUCTOR (C-501)	3	MISC/C-501	2

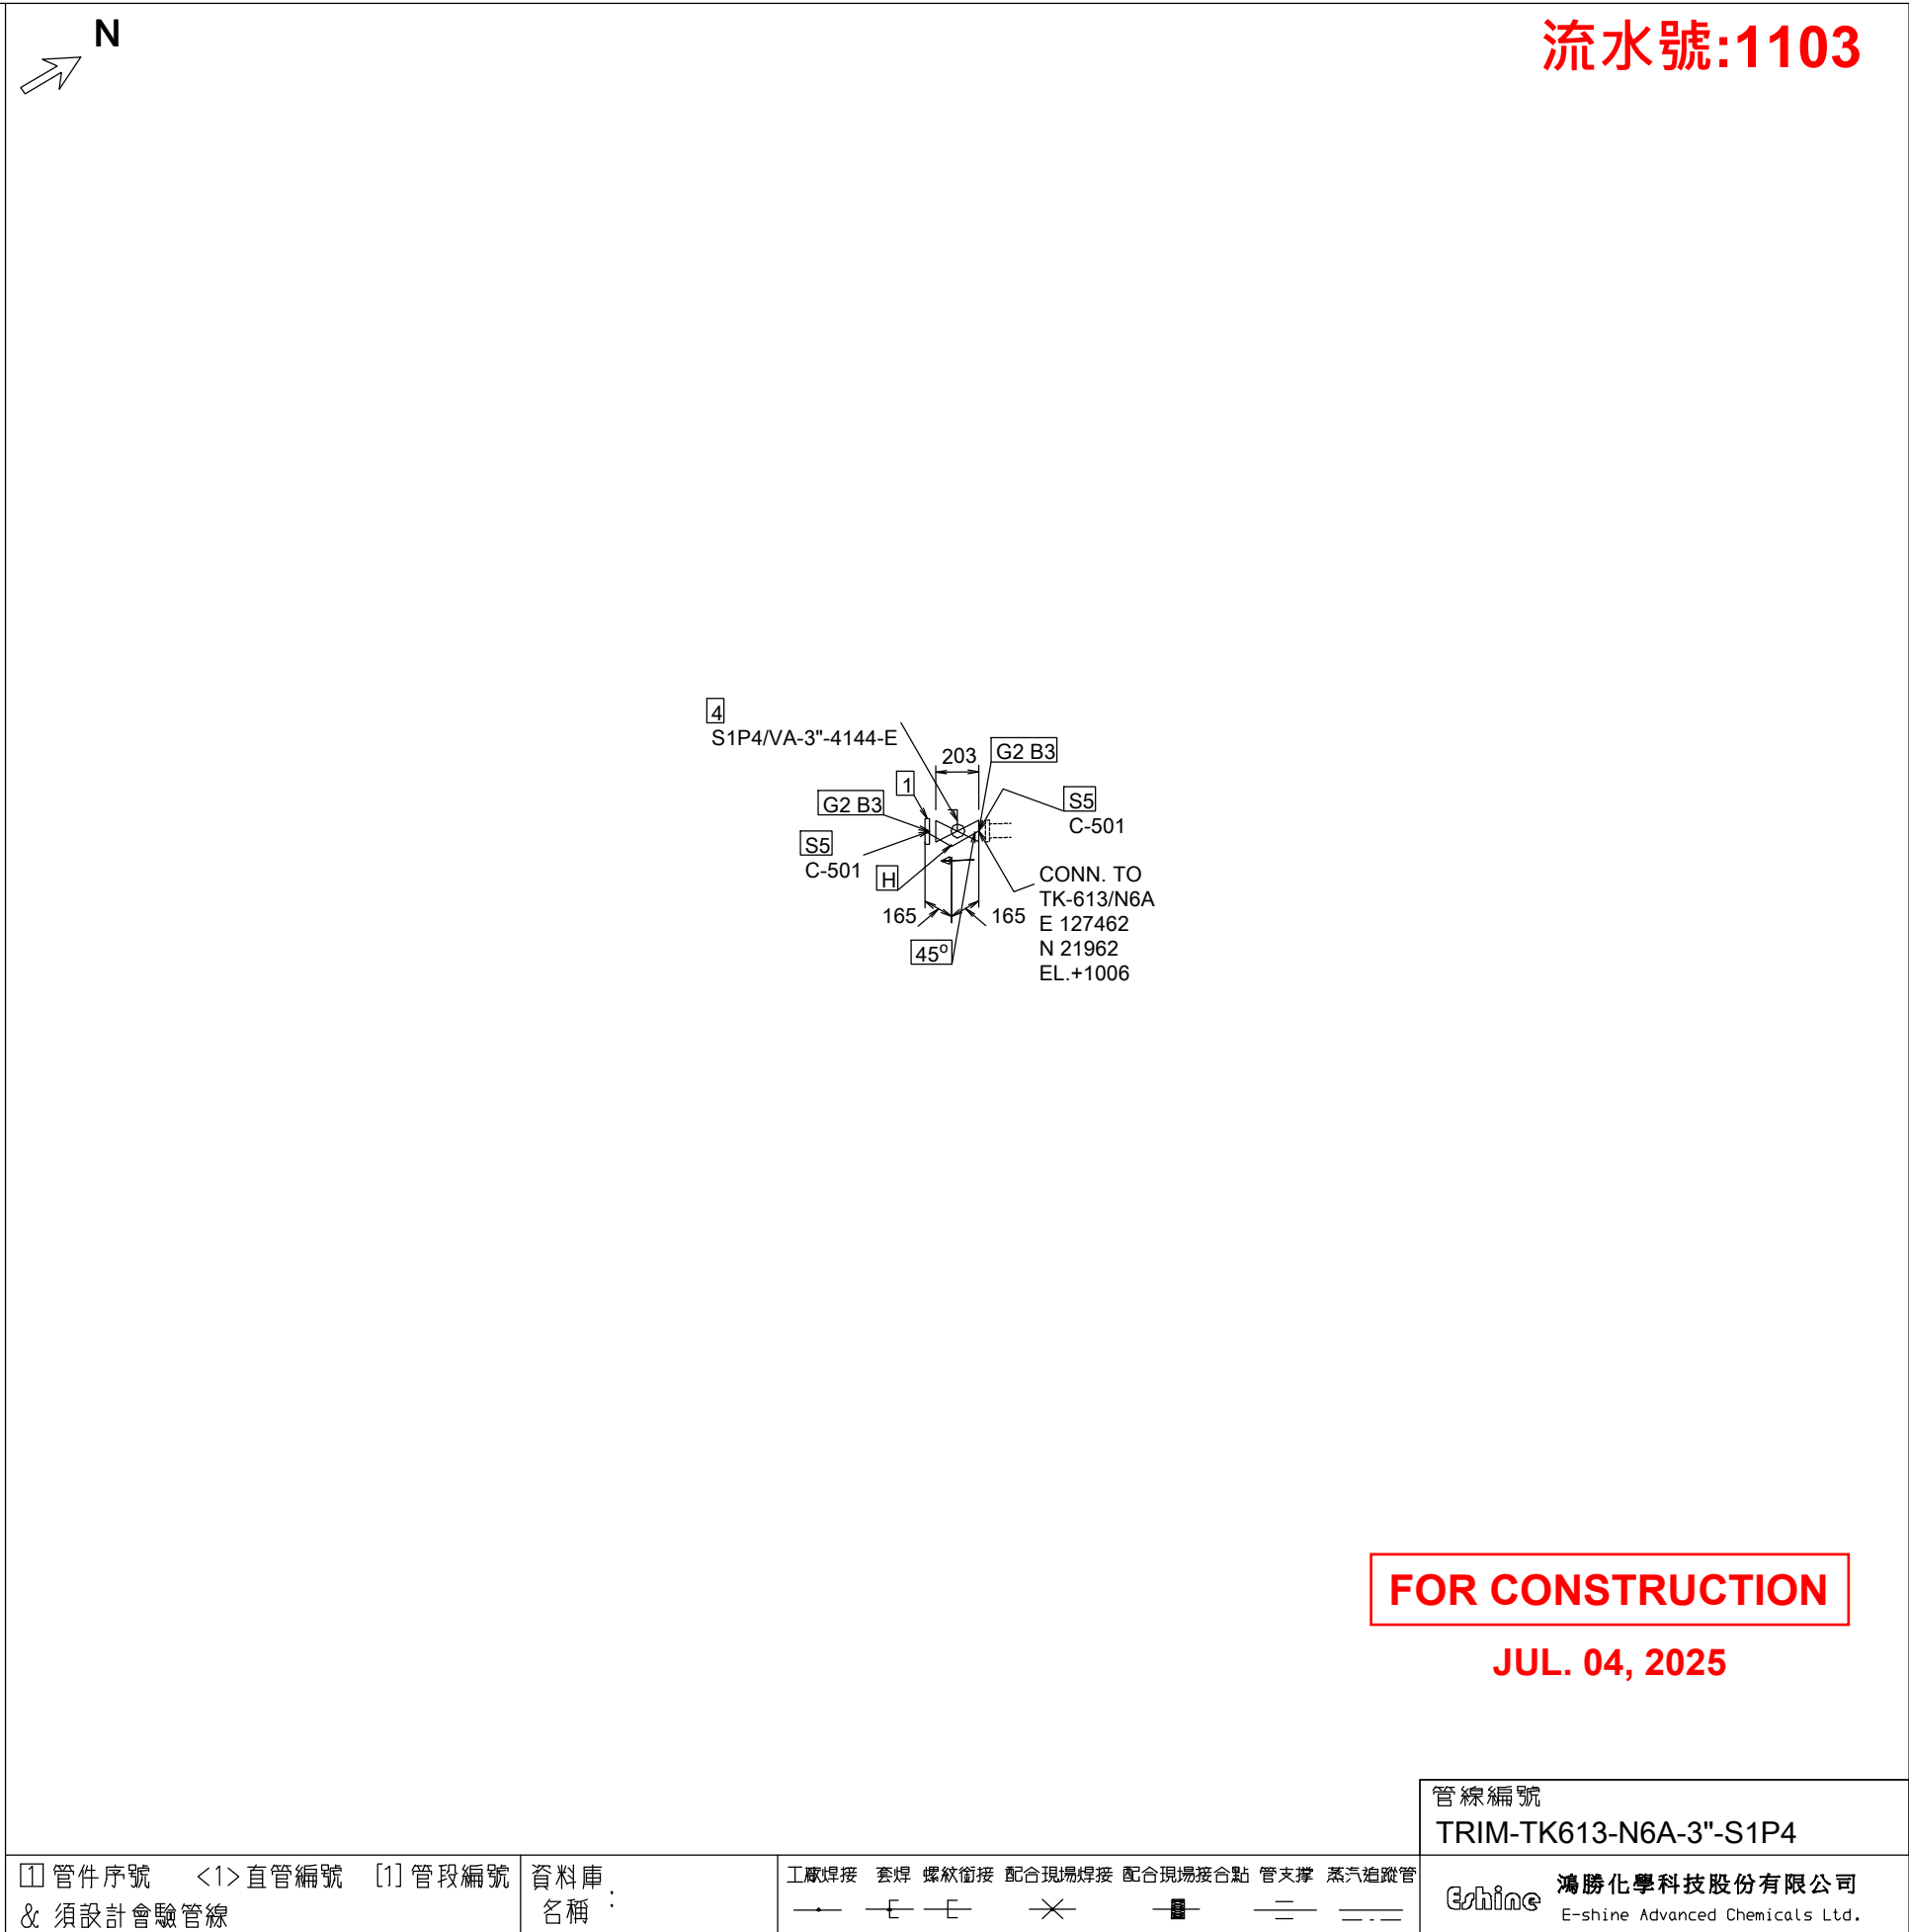

**FOR CONSTRUCTION**

**JUL. 04, 2025**

[illegible]