


本圖完工後請速歸還

流水號:639

[illegible]

ERECTION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
GASKETS				
1	GASKET 150# RF 3.0 MM THICK VIRGIN PTFE ZW#7500 ASME B16.21/B16.5	4	S1P4/GR-4"-ZW#7500	2
BOLTS				
2	STUD BOLT A193 GR.B8 W/ TWO HEX. HEAD HEAVY NUT A194 GR.8 ASME B1.1 B18.2.2	5/8	S1P4/BS4-5/8"X95L	16
VALVES / IN-LINE ITEMS				
3	BALL 150# RF A351-CF8/304SS+PTFE FULL PORT FIRE SAFE WRENCH OPER. ASME B16.34 (VOC<100 vppm)	4	S1P4/VA-4"-4144-E	1
SUPPORTS				
4	FLANGE GROUNDING CONDUCTOR (C-501)	4	MISC/C-501	2

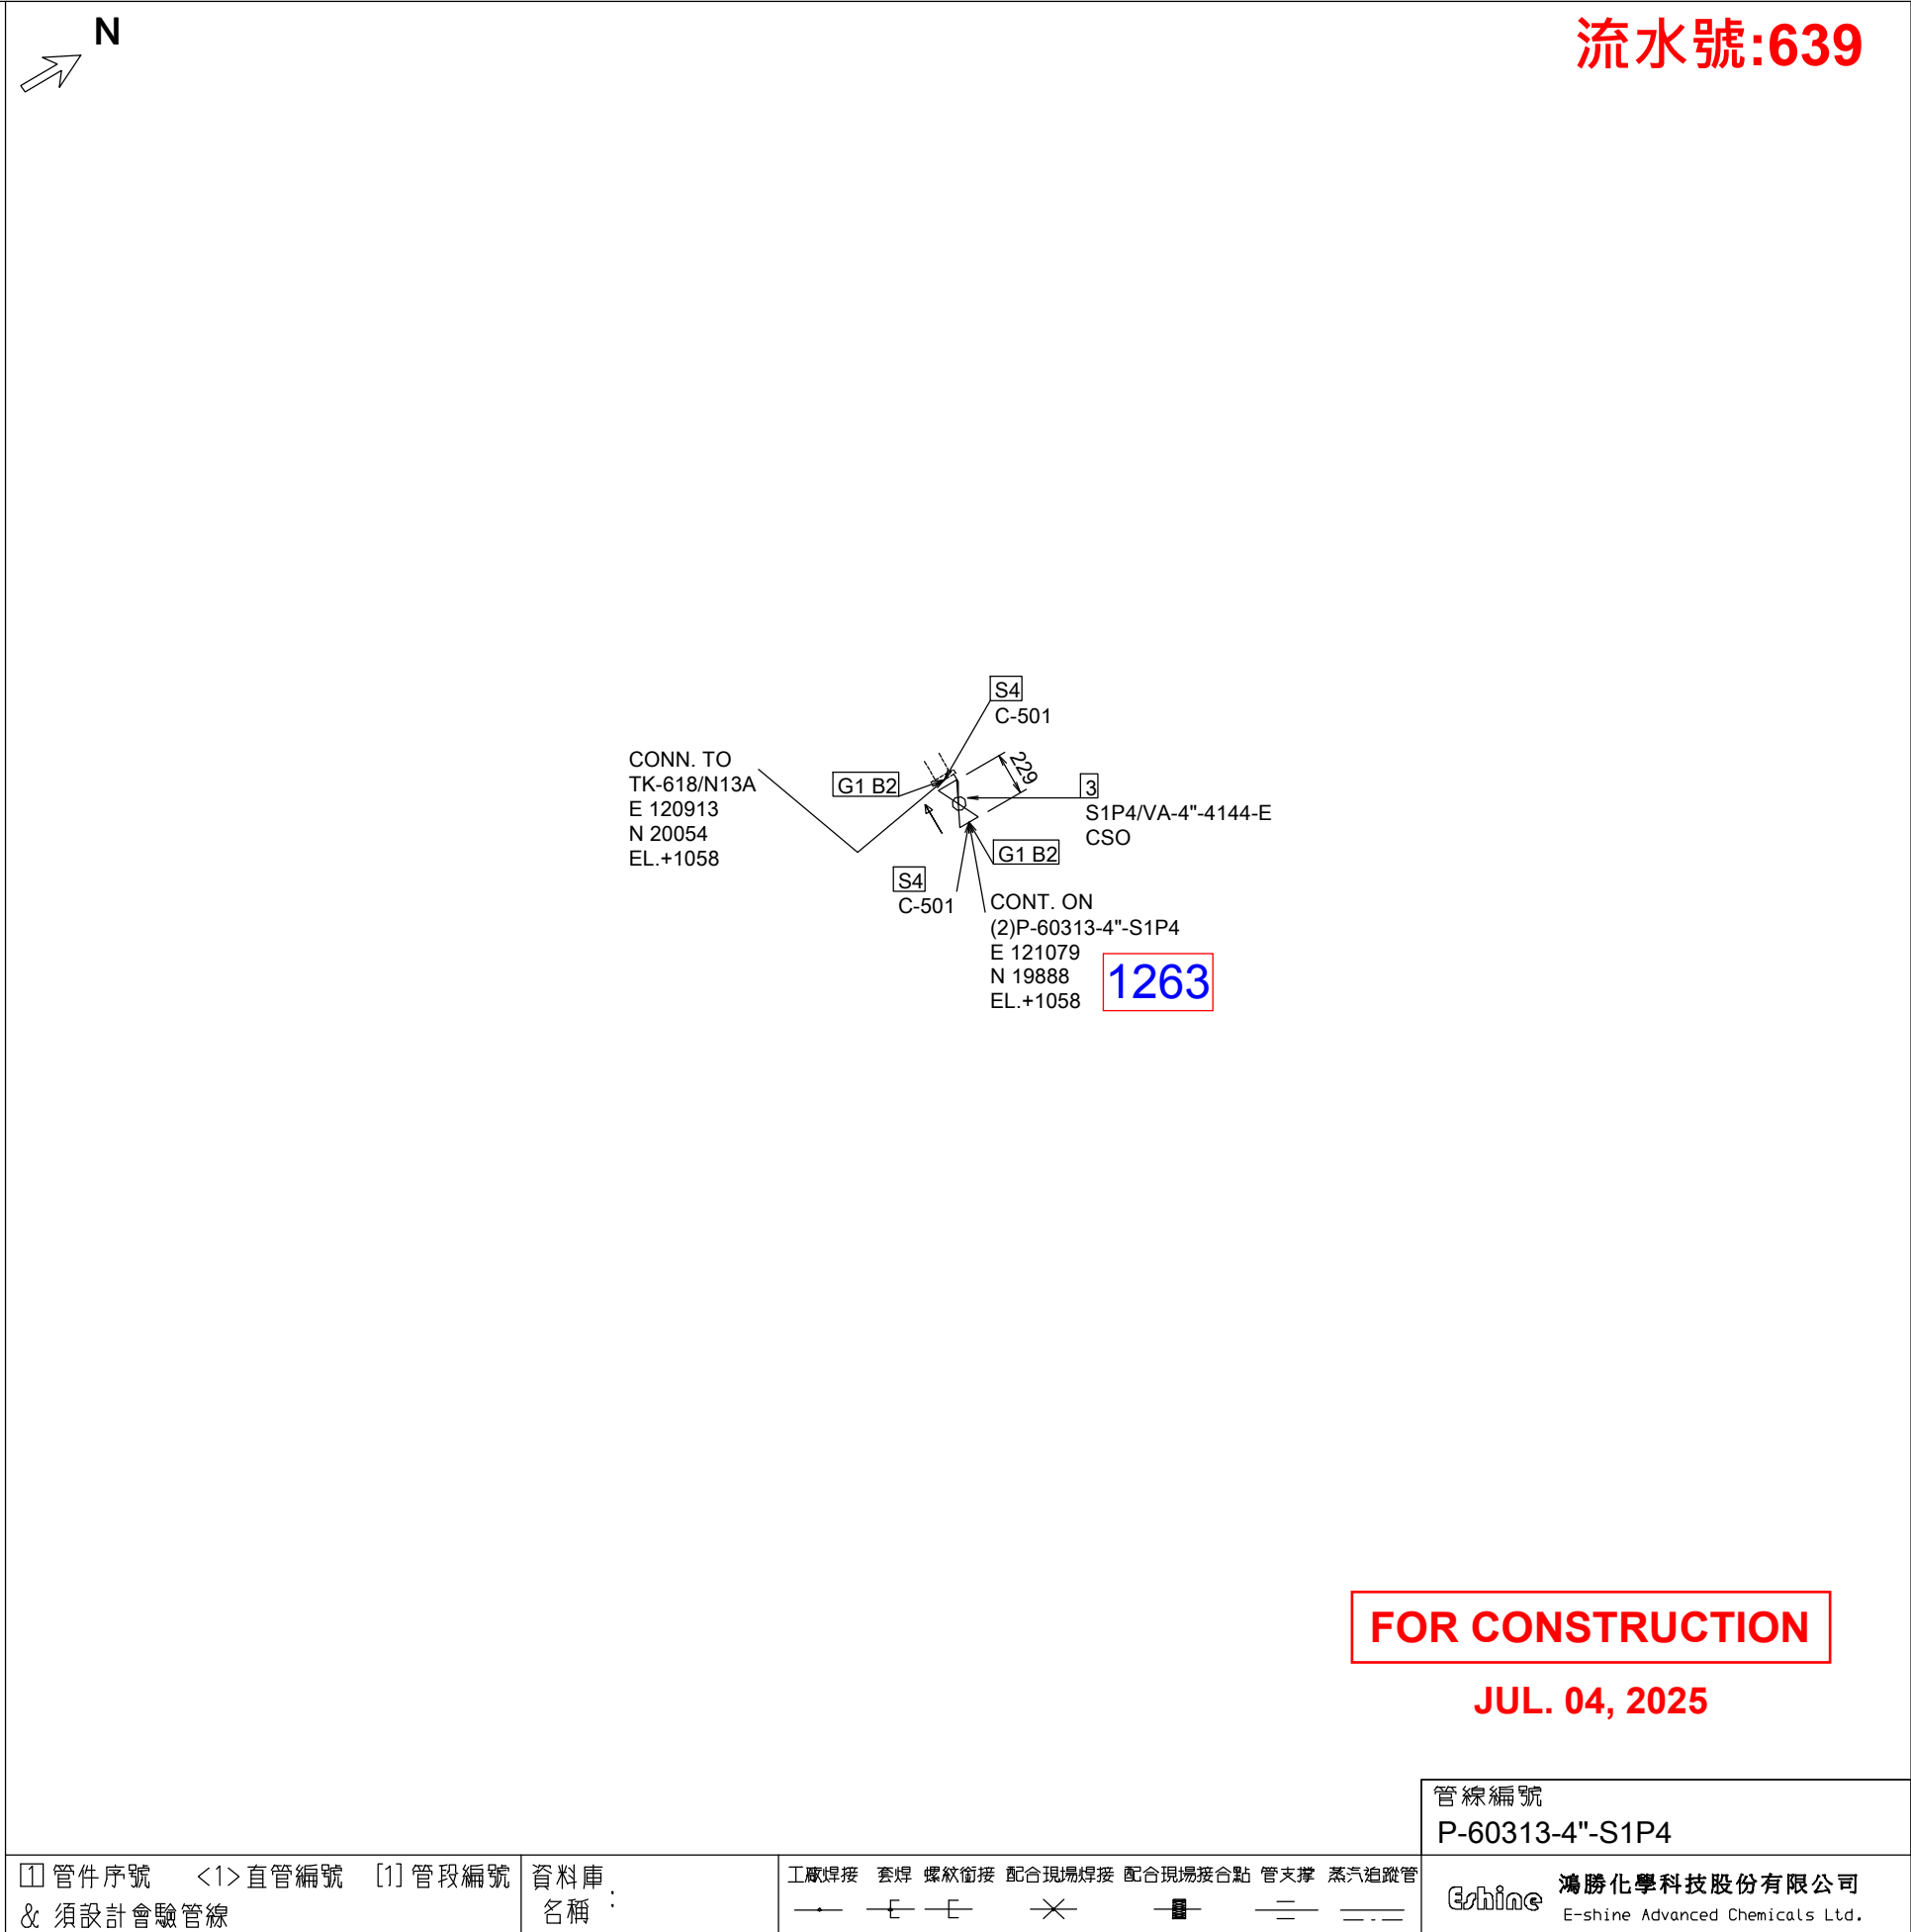

操作壓力: 4.9 $\frac{KG}{CM^2} G$		操作溫度: 38 $^{\circ}C$		管線等級: S1P4		製 圖 陳怡如 2025.04.21		會 簽			<div> 富台工程股份有限公司 FU-TAI ENGINEERING CO., LTD.</div> <div>審尾一期 管線工程 1 建廠工程 立體配管圖 1</div> <div>檔號: P-60313-S1P4- 1</div>	
設計壓力: 8.3 $\frac{KG}{CM^2} G$		設計溫度: 80 $^{\circ}C$		保溫(冷)等級:		設 計 黃炳富 2025.04.21						
試驗基準: Air		9.13 $\frac{KG}{CM^2} G \times 60$ 分		熱迫縱等級:		審 核 陳安誠 2025.04.21						
管路塗裝:		管 支 撐	碳鋼及不銹: 鋼保溫(冷): 不銹鋼		焊接基準:		認 可 陳達明 2025.04.21					
焊道: 塗裝:					NDE 抽驗: 10 %		依據圖號: C2418-4-514		圖號:			